LOC RWY 21

FLORA MUNI (FOA)

LOC/DME I-RTT	APP CRS	Rwy Ldg	5003
108.55	211°	TDZE	470
Chan 22 (Y)		Apt Elev	473

DME required.
RADAR required for procedure entry at LASDE.

NA — Rwy 21 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 15 and 33. VDP NA when using OLY altimeter setting. When local altimeter setting not received, use OLY altimeter setting and increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 1200 then climbing right turn to 2300 direct BIB VORTAC and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
120.175	127.7 351.825	122.7 (CTAF) L

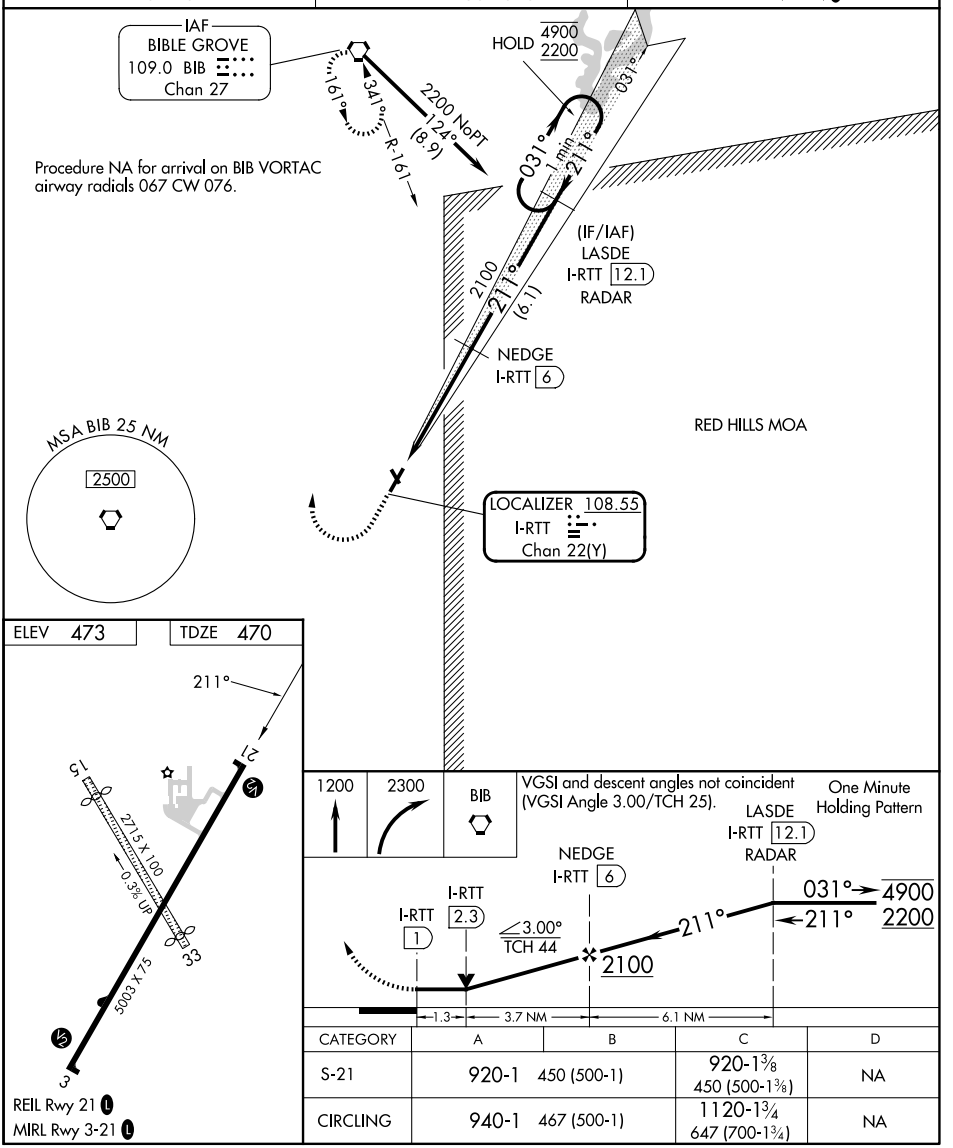

CATEGORY	A	B	C	D
S-21	920-1 450 (500-1)		920-1⅜ 450 (500-1⅜)	NA
CIRCLING	940-1 467 (500-1)		1120-1¾ 647 (700-1¾)	NA

EC-3, 03 SEP 2026 to 01 OCT 2026
EC-3, 03 SEP 2026 to 01 OCT 2026