


WAAS CH 77622 W15A	APP CRS 148°	Rwy Ldg TDZE Apt Elev 4000 1061 1062
--	------------------------	--

RNAV (GPS) RWY 15

HUTCHINSON MUNI/BUTLER FLD (HCD)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3000 direct WOBGI and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GYL altimeter setting. When local altimeter setting not received, use GYL altimeter setting and increase LPV DA to 1353 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1370 feet; increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.			
AWOS-3 118.525	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0

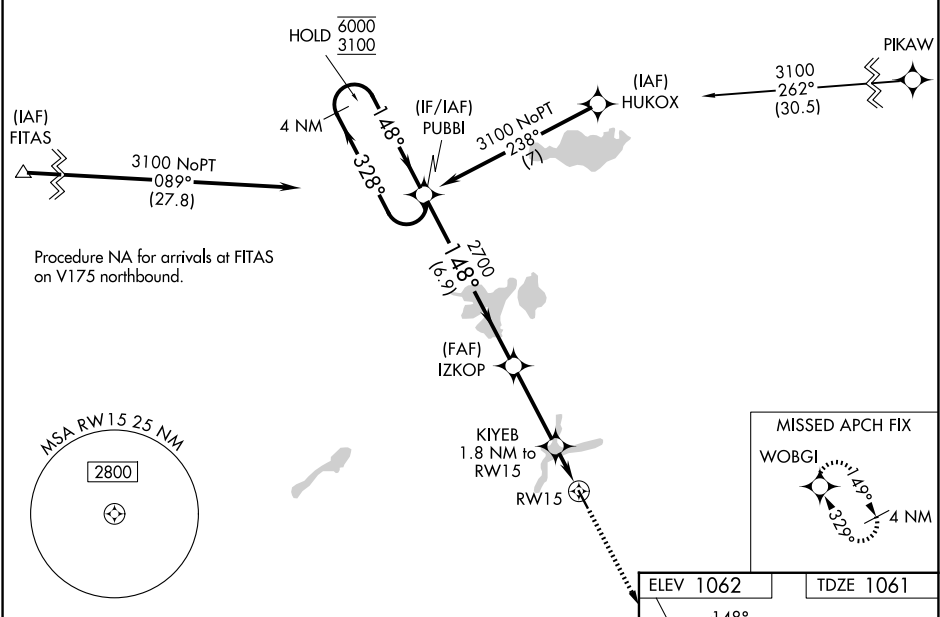

4 NM Holding Pattern		PUBBI		3000 WOBGI	
6000 ← 328°		3100 → 148°		148°	
GP 3.00°		TCH 40°		2700	
6.9 NM		3.2 NM		0.8 1 NM	
CATEGORY	A	B	C	D	
LPV DA	1311-¾	250 (300-¾)		NA	
LNAV/VNAV DA	1328-⅞	267 (300-⅞)		NA	
LNAV MDA	1420-1	359 (400-1)		NA	
CIRCLING	1580-1 518 (600-1)	1600-1 538 (600-1)	1740-2 678 (700-2)	NA	

ELEV 1062

TDZE 1061

148°

33

4000 x 75

MIRL Rwy 15-33 **0**

REIL Rwys 15 and 33 **0**