

WAAS CH 86322 W33A	APP CRS 329°	Rwy Ldg TDZE 1062 Apt Elev 1062
--	------------------------	---

RNAV (GPS) RWY 33

HUTCHINSON MUNI/BUTLER FLD (HCD)

RNP APCH - GPS.


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
Baro-VNAV and VDP NA when using GYL altimeter setting. When local altimeter setting not received, use GYL altimeter setting and increase LPV DA to 1354 feet and all visibilities ⅓ SM; increase LNAV/VNAV DA to 1391 feet and all visibilities ⅓ SM; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3100 direct PUBBI and hold.

AWOS-3 118.525	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	--

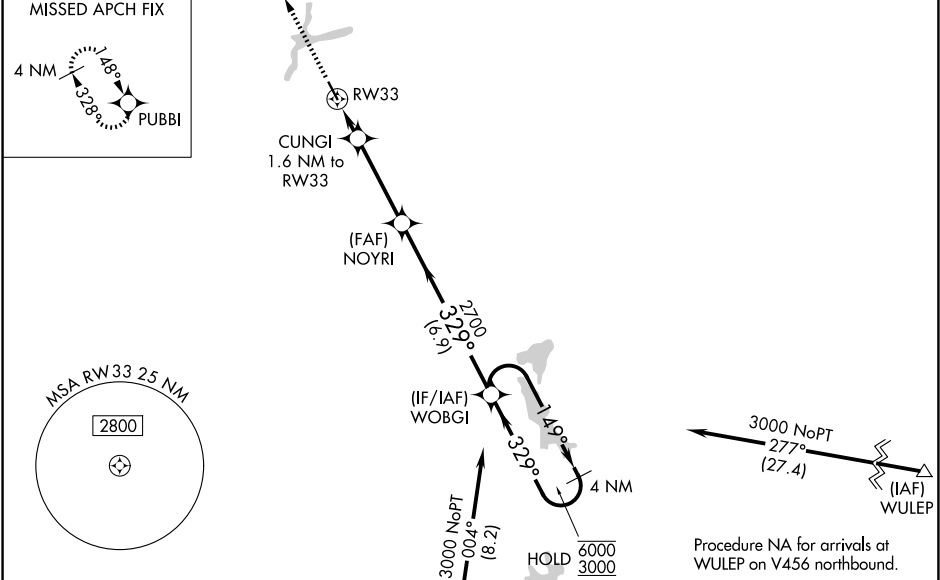

ELEV 1062	TDZE 1062
-----------	-----------

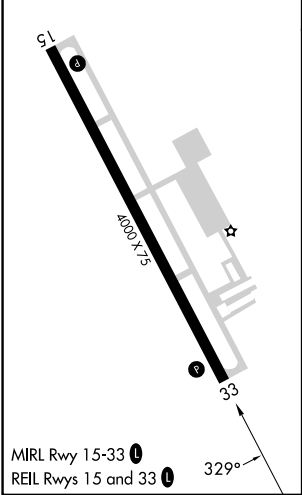

3100	PUBBI	CUNGI 1.6 NM to RW33	NOYRI	WOBGI	4 NM Holding Pattern
1.1 NM	0.5	1.1 NM to RW33	2700	1600	2700
1.1 NM	0.5	3.4 NM	6.9 NM	GP 3.00° TCH 40	
CATEGORY	A	B	C	D	
LPV DA	1312-¾	250 (300-¾)		NA	
LNAV/VNAV DA	1349-⅞	287 (300-⅞)		NA	
LNAV MDA	1440-1	378 (400-1)		NA	
CIRCLING	1580-1 518 (600-1)	1600-1 538 (600-1)	1740-2 678 (700-2)	NA	