

WAAS CH 53530 W32A	APP CRS 317°	Rwy Ldg 3300 TDZE 1082 Apt Elev 1083
--	------------------------	---

RNAV (GPS) RWY 32

LAC QUI PARLE COUNTY (DXX)



RNP APCH - GPS.

▼

Baro-VNAV NA when using Appleton Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy's 9 and 27. When local altimeter setting not received, use Appleton Muni altimeter setting: increase LPV DA to 1329 feet; increase LNAV/VNAV DA to 1409 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C visibility ½ SM.

MISSED APPROACH: Climb to 3000 direct WERUL and hold.

AWOS-3PT 118.975	MINNEAPOLIS CENTER 128.5 306.2	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

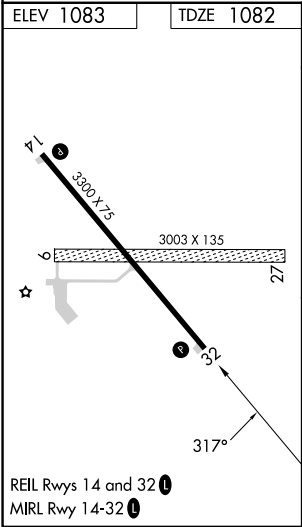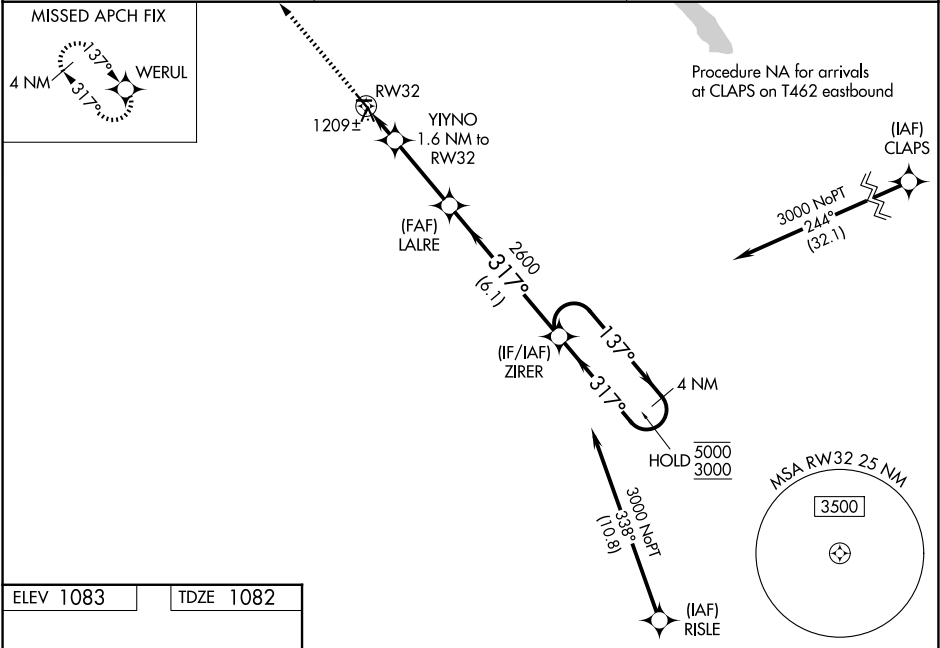

3000	WERUL	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).			
		LALRE	ZIRER	4 NM Holding Pattern	
	YIYNO	2600	137°	5000	
	1.6 NM to RW32		317°	3000	
	RW32	1620	2600		GP 3.00° TCH 45
		1.6 NM	3 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1282-3/4 200 (200-3/4)				NA
LNAV/VNAV DA	1363-7/8 281 (300-7/8)				NA
LNAV MDA	1460-1	378 (400-1)	1460-1 1/8 378 (400-1 1/8)	NA	
CIRCLING	1640-1	557 (600-1)	1820-2 737 (800-2)	NA	

NC-1, 03 SEP 2026 to 01 OCT 2026

NC-1, 03 SEP 2026 to 01 OCT 2026