

WAAS CH 70504 W36A	APP CRS 356°	Rwy Ldg 5201 TDZE 1277 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 36
WELLINGTON MUNI (EGT)

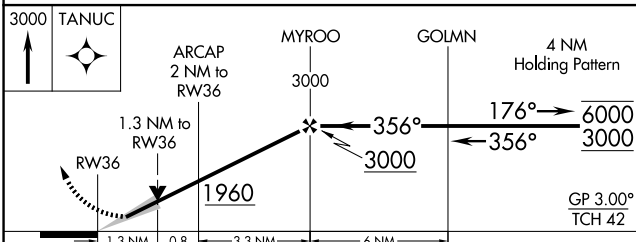
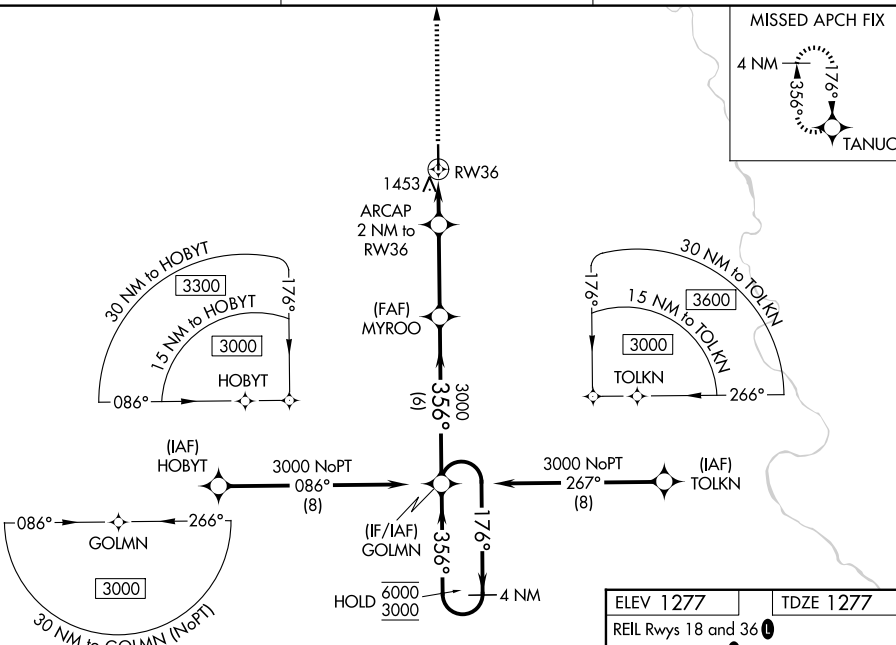
RNP APCH - GPS.

T Baro-VNAV and VDP NA when using ICT altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local
altimeter setting not received, use ICT altimeter setting: increase LPV DA to 1580
feet; increase LNAV/VNAV DA to 1667 feet and all visibilities $\frac{1}{8}$ SM; increase all
MDAs 60 feet and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3000
direct TANUC and hold.

AWOS-3P
118.875

WICHITA APP CON
134.85

UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D
LPV DA	1527-1 250 (300-1)			
RNAV/ VNAV DA	1614-1 337 (400-1)			
RNAV MDA	1720-1 443 (500-1)	1720-1 $\frac{3}{8}$ 443 (500-1 $\frac{3}{8}$)		
CIRCLING	1760-1 483 (500-1)	2040-2 $\frac{1}{4}$ 763 (800-2 $\frac{1}{4}$)	2140-2 $\frac{3}{4}$ 863 (900-2 $\frac{3}{4}$)	

