

APP CRS
260°

Rwy Ldg
TDZE
Apt Elev

6500
3212
3261

RNAV (GPS) RWY 27

SAN CARLOS APACHE (P13)

RNP APCH.


▼

NA

Rwy 27 helicopter visibility reduction below 3/4 SM NA.
VDP NA when using San Manuel altimeter setting. When local altimeter setting not received, use San Manuel altimeter setting and increase all MDA 120 feet.

MISSED APPROACH: (Do not exceed 175K until IFURI) Climb to 4600 then climbing right turn to 7200 direct IFURI and hold, do not exceed 230K when continuing climb-in-hold to 7200.
*Missed approach requires minimum climb of 290 feet per NM to 5340.

AWOS-3 120.075	ALBUQUERQUE CENTER 125.4 269.3	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------------	--------------------------

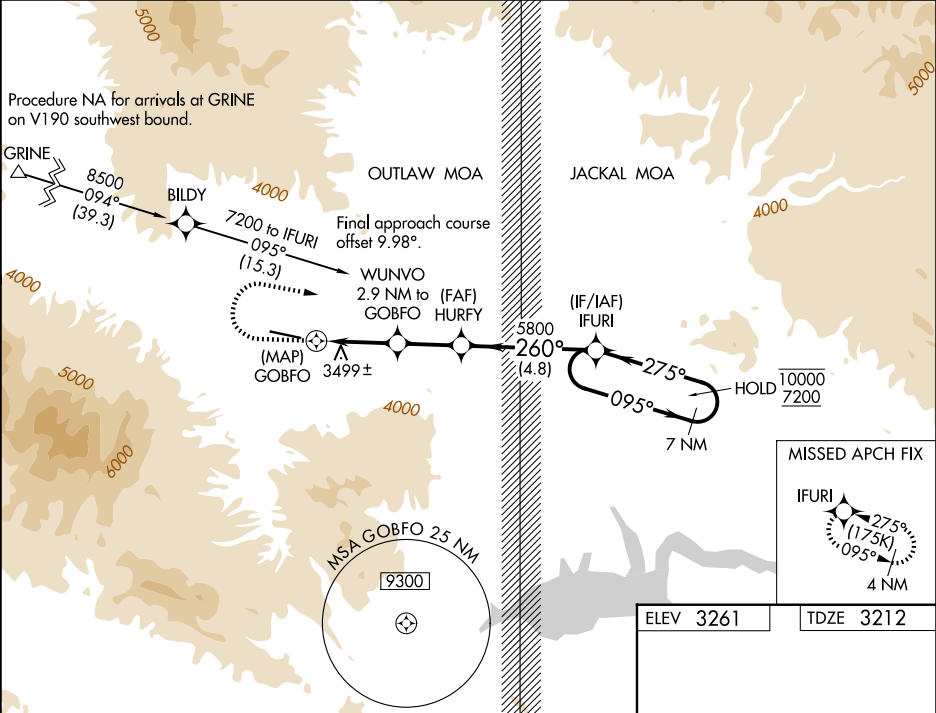

4600

7200

IFURI

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 43).

↑

↗

✧

WUNVO
2.9 NM to GOBFO

HURFY

IFURI

7 NM Holding Pattern

1.1 NM to GOBFO

GOBFO

GOBFO

≤4.20° TCH 43

5800

4780

260°

095°

275°

10000

7200

0.6

1.1 NM

1.8 NM

2.3 NM

4.8 NM

CATEGORY	A	B	C	D
LNAV MDA*	3760-1	548 (500-1)	NA	
LNAV MDA	4180-1¼ 968 (1000-1¼)	4180-1½ 968 (1000-1½)	NA	
CIRCLING	4180-1¼ 919 (1000-1¼)	4180-1½ 919 (1000-1½)	NA	

ELEV 3261

TDZE 3212

MIRL Rwy 9-27 0

REIL Rws 9 and 27

6500 X 100

1.2% UP

27

260°