

WAAS CH 61038 W05A	APP CRS 053°	Rwy Ldg 5005 TDZE 270 Apt Elev 273
--	------------------------	---


RNAV (GPS) RWY 5
SANDERSON FLD (SHN)

RNP APCH - GPS.


T Circling NA for Cats C and D south of Rwy 5-23. Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use OLM altimeter setting: increase all MDAs 60 feet and increase LNAV visibility Cats C and D $\frac{1}{4}$ SM; increase Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3000
direct CARRO and hold.


ASOS 119.275	SEATTLE APP CON 121.1 290.9	UNICOM 122.8 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

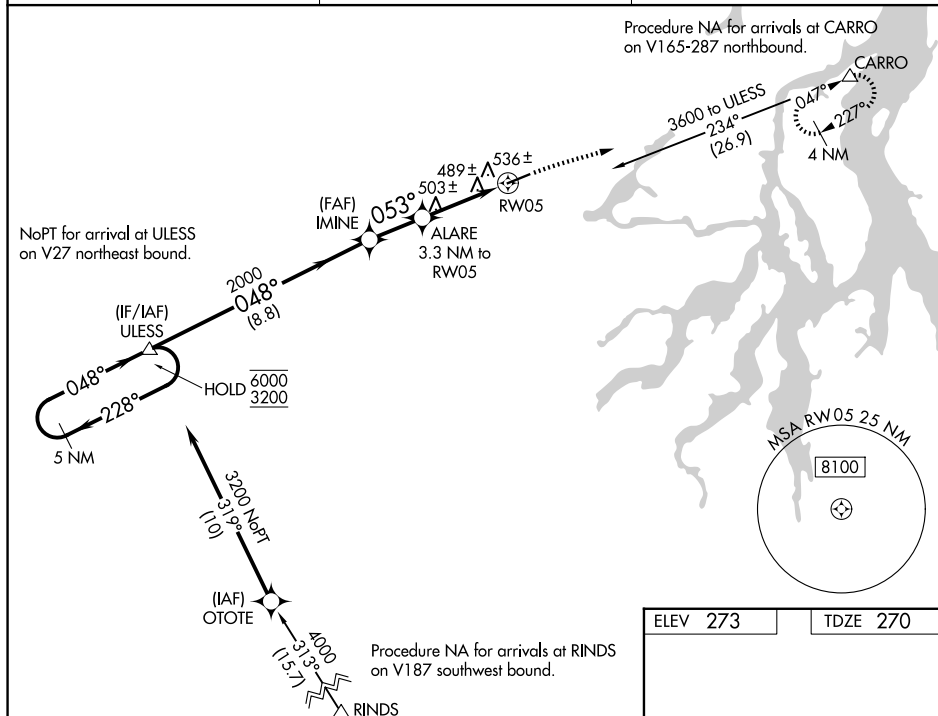

ELEV 273		TDZE 270
----------	--	----------

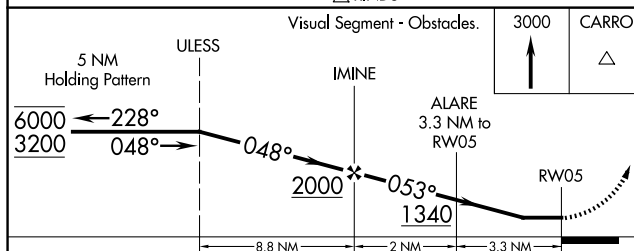

CATEGORY	A	B	C	D
LP MDA	740-1	470 (500-1)	740-1 $\frac{3}{8}$	470 (500-1 $\frac{3}{8}$)
INAV MDA	800-1	530 (600-1)	800-1 $\frac{1}{2}$	530 (600-1 $\frac{1}{2}$)
CIRCLING	840-1 567 (600-1)	860-1 587 (600-1)	860-1 $\frac{1}{2}$ 587 (600-1 $\frac{1}{2}$)	1200-3 927 (1000-3)

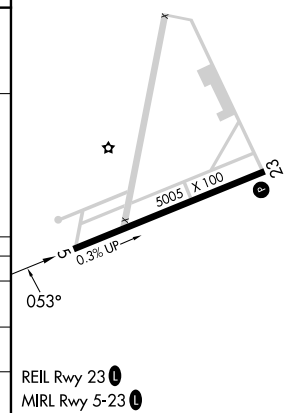

RNAV (GPS) RWY 5