

WAAS CH 56526 W09A	APP CRS 091°	Rwy Ldg TDZE 778 Apt Elev 778
--	------------------------	---

RNAV (GPS) RWY 9

RED WING RGNL (RGK)


Baro-VNAV NA when using South St. Paul altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. VDP NA with South St. Paul altimeter setting. When local altimeter setting not received, use South St. Paul altimeter setting; increase LPV DA to 1050 feet, LNAV/VNAV DA to 1232 feet, and visibility LNAV/VNAV ¾ SM all Cats; increase all MDA 80 feet and visibility LNAV Cat B/C/D and Circling Cat B/C ¼ SM. For inop MALSR, increase LNAV Cat C/D visibility ¾ mile. For inop MALSR when using South St. Paul altimeter setting, increase LPV visibility ¾ mile all Cats, LNAV/VNAV all Cats and LNAV Cat C/D visibility ¾ mile.

MALSR

MISSED APPROACH:

Climb to 3000 direct ZAMLU and hold.

AWOS-3 119.25	MINNEAPOLIS APP CON 121.2 335.65	UNICOM 123.05 (CTAF) 0
-------------------------	--	----------------------------------

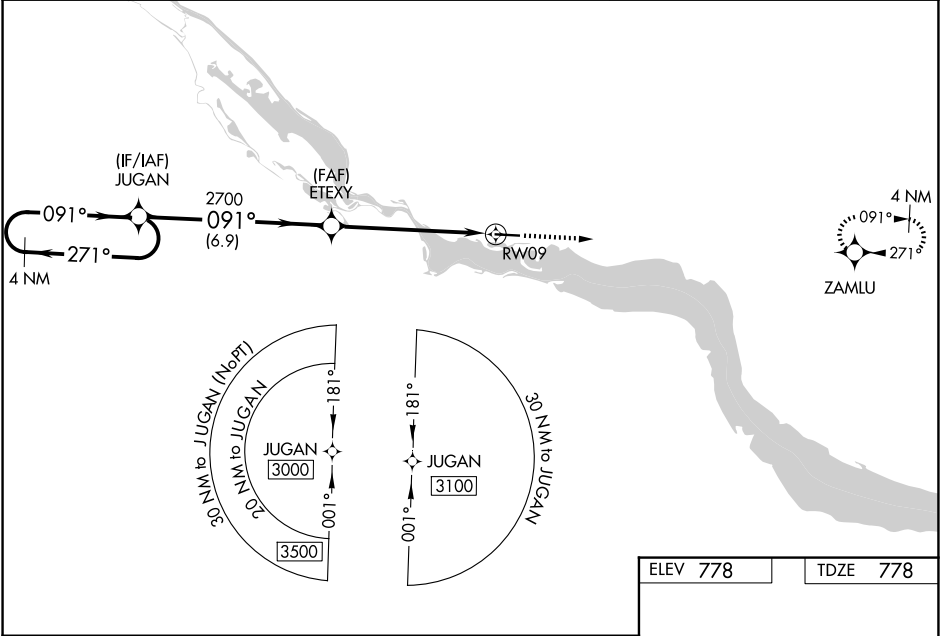

4 NM Holding Pattern

JUGAN

3000

271°

091°

091°

2700

ETEXY

2700

*1.4 NM to RWY09

RWY09

GP 3.00° TCH 50

6.9 NM

4.5 NM

1.4

3000

ZAMLU

*LNAV only

CATEGORY	A	B	C	D
LPV DA		978-½	200 (200-½)	
LNAV/VNAV DA		1160-¾	382 (400-¾)	
LNAV MDA	1260-½	482 (500-½)	1260-1	482 (500-1)
CIRCLING	1480-1 702 (800-1)	1520-1 742 (800-1)	1640-2½ 862 (900-2½)	1780-3 1002 (1100-3)

ELEV 778

TDZE 778

5010 X 100

091°

HIRL Rwy 9-27 0

NC-1, 03 SEP 2026 to 01 OCT 2026

NC-1, 03 SEP 2026 to 01 OCT 2026