RNAV (GPS) RWY 27

VINTON VETERANS MEML AIRPARK (VTI)

WAAS CH 62917 W27A	APP CRS 272°	Rwy Ldg 4000 TDZE 839 Apt Elev 842

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using IIB altimeter setting. When local altimeter setting not received, use IIB altimeter setting: increase LPV DA to 1140 feet, LNAV/VNAV DA to 1374 feet and all visibilities ⅛ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3000 direct WUZMU and hold.

AWOS-3	CEDAR RAPIDS APP CON ★	UNICOM
120.075	134.05 266.8	122.8 (CTAF) L

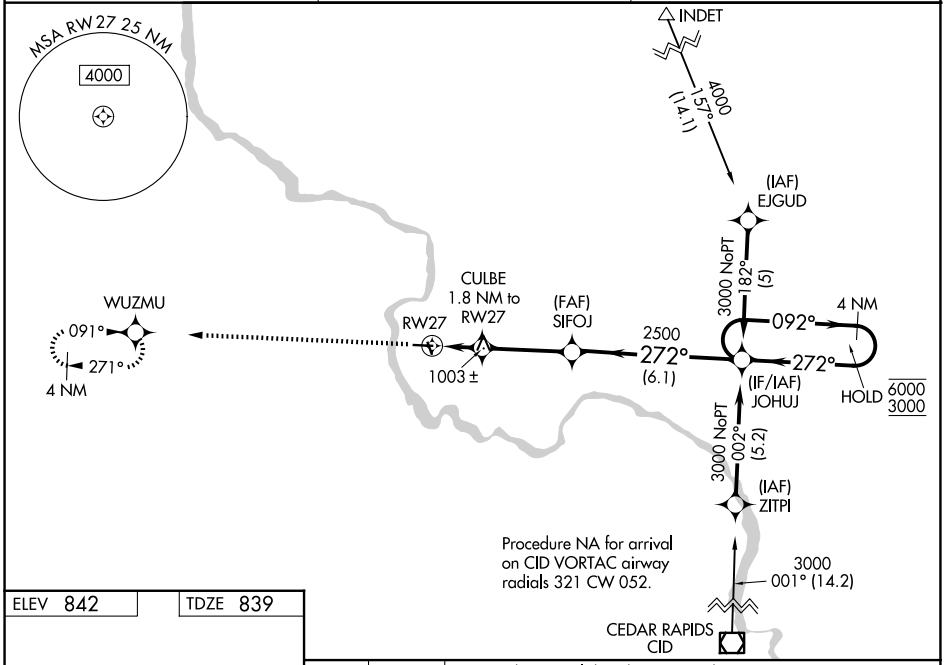

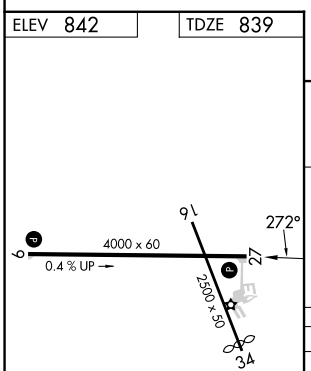

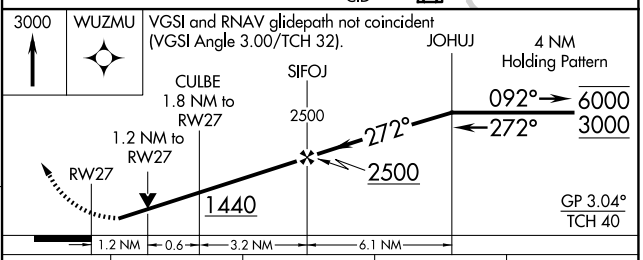

CATEGORY	A	B	C	D
LPV DA	1089-1 250 (300-1)		NA	
LNAV/VNAV DA	1260-1¼ 421 (500-1¼)		NA	
LNAV MDA	1260-1 421 (500-1)		NA	
CIRCLING	1320-1 478 (500-1)	1360-1 518 (600-1)	NA	

NC-3, 03 SEP 2026 to 01 OCT 2026
NC-3, 03 SEP 2026 to 01 OCT 2026