

WAAS CH 77732 W18A	APP CRS 177°	Rwy Ldg TDZE 1081 Apt Elev 1088
--	------------------------	---

RNAV (GPS) RWY 18

AMERY MUNI (AHH)


RNP APCH - GPS.

NA

Rwy 18 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use RNH altimeter setting; when not received, use OEO altimeter setting and increase all MDAs 20 feet and LP and LNAV visibility Cat C 1/8 SM, and Circling Cat C visibility 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct FISOM and hold.

RNH AWOS-3 120.0	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

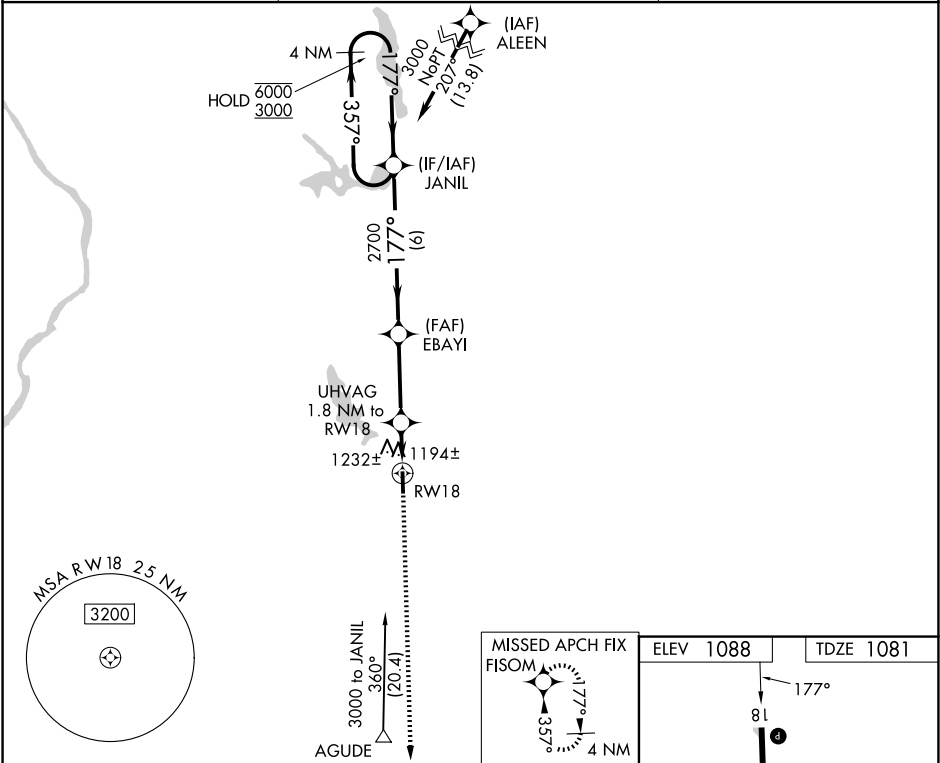

4 NM Holding Pattern		Visual Segment - Obstacles.		3000	FISOM
CATEGORY	A	B	C	D	
LP MDA	1500-1	419 (500-1)	1500-1 1/8 419 (500-1 1/8)	NA	
LNAV MDA	1600-1	519 (600-1)	1600-1 3/8 519 (600-1 3/8)	NA	
CIRCLING	1740-1	652 (700-1)	1740-1 3/4 652 (700-1 3/4)	NA	

