


WAAS CH 61140 W35A	APP CRS 354°	Rwy Ldg TDZE 1003 Apt Elev 1003
--	------------------------	---

RNAV (GPS) RWY 35
PERRY MUNI (F22)

NA

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility ¼ SM, increase all MDAs 60 feet and Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct AHOBY and hold.

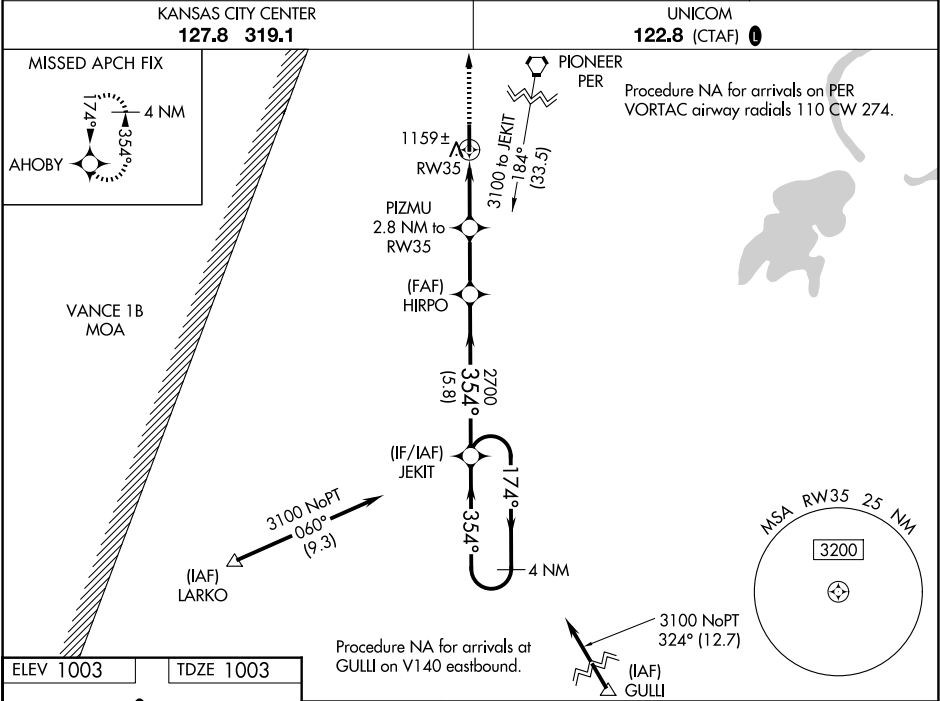

CATEGORY		A		B		C		D	
LPV	DA	1253-¾		250 (300-¾)				NA	
LNAV/VNAV	DA	1330-1⅛		327 (400-1⅛)				NA	
LNAV	MDA	1420-1		417 (500-1)		1420-1⅛ 417 (500-1⅛)		NA	
CIRCLING		1480-1		477 (500-1)		1620-1¾ 617 (700-1¾)		NA	

SC-1, 03 SEP 2026 to 01 OCT 2026

SC-1, 03 SEP 2026 to 01 OCT 2026