


WAAS CH 72841 W21A	APP CRS 200°	Rwy Ldg TDZE Apt Elev	4400 18 19
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 21

TOGIAK (TOG)(PATG)

RNP APCH - GPS.	MISSED APPROACH: Climb to 500 then climb to 4400 direct ROGOC and hold, continue climb-in-hold to 4400.
▼ When local altimeter setting not received, procedure NA. ⚠ Circling NA northwest of Rwy 3-21. Circling Rwy 10, 28 NA at night.	

AWOS-3P 119.3	ANCHORAGE CENTER 132.75 282.35	CTAF 122.5 0
-------------------------	--	------------------------

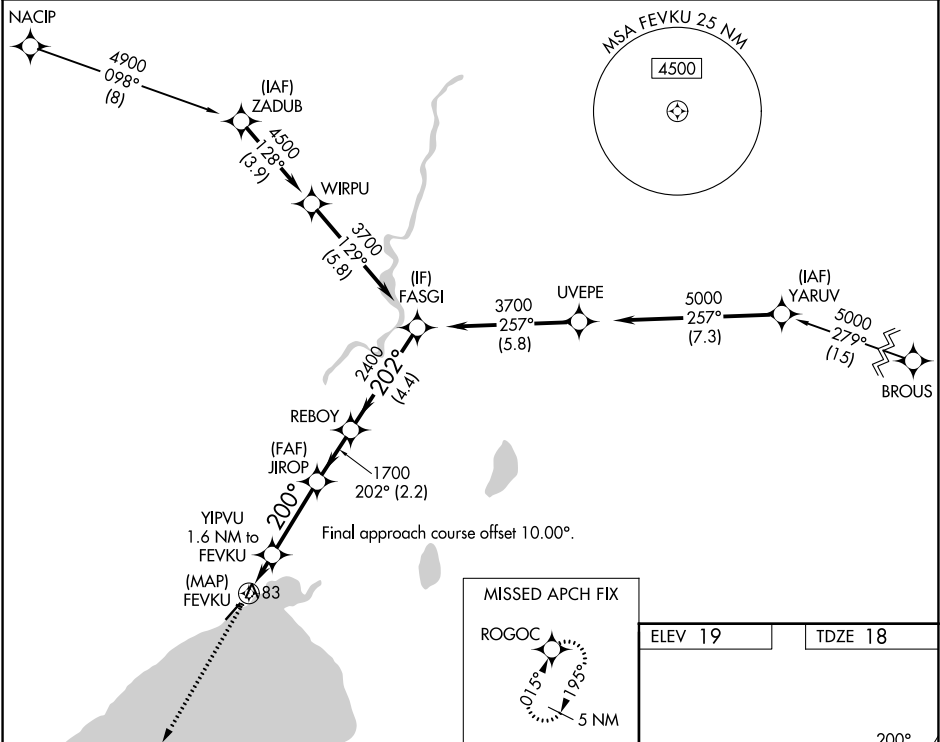

500	4400	ROGOC	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 31).			
↑	↑	✦	YIPVU 1.6 NM to FEVKU	JIROP	REBOY	FASGI
Diagram details: The profile view shows a descent path starting at 500 feet, descending at 3.00° (TCH 40) to 720 feet at a distance of 0.5 NM. From 720 feet, the path descends at 200° to 1700 feet at a distance of 1.6 NM. From 1700 feet, the path descends at 202° to 2400 feet at a distance of 3.1 NM. From 2400 feet, the path descends at 202° to 3700 feet at a distance of 2.2 NM. The total distance from 500 feet to 3700 feet is 4.4 NM. The diagram also shows a dashed line for the 3.00° descent angle and a solid line for the 202° descent angle.						
CATEGORY	A		B		C	D
LP MDA			340-1 322 (400-1)			
LNAV MDA			340-1 322 (400-1)			
CIRCLING	400-1		480-1		480-1½	
	381 (400-1)		461 (500-1)		461 (500-1½)	
				800-2½		
				781 (800-2½)		

