
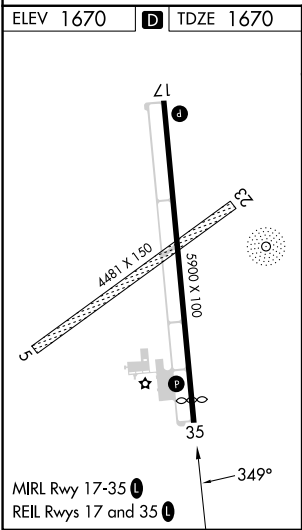


WAAS CH 49113 W35A	APP CRS 349°	Rwy Ldg 5500 TDZE 1670 Apt Elev 1670
--	------------------------	---

RNAV (GPS) RWY 35
YORK MUNI (JYR)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use AUH altimeter setting: increase LPV DA to 1978 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 2062 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using AUH altimeter setting.	MISSED APPROACH: Climb to 4000 direct EHJAM and hold.
--	--

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

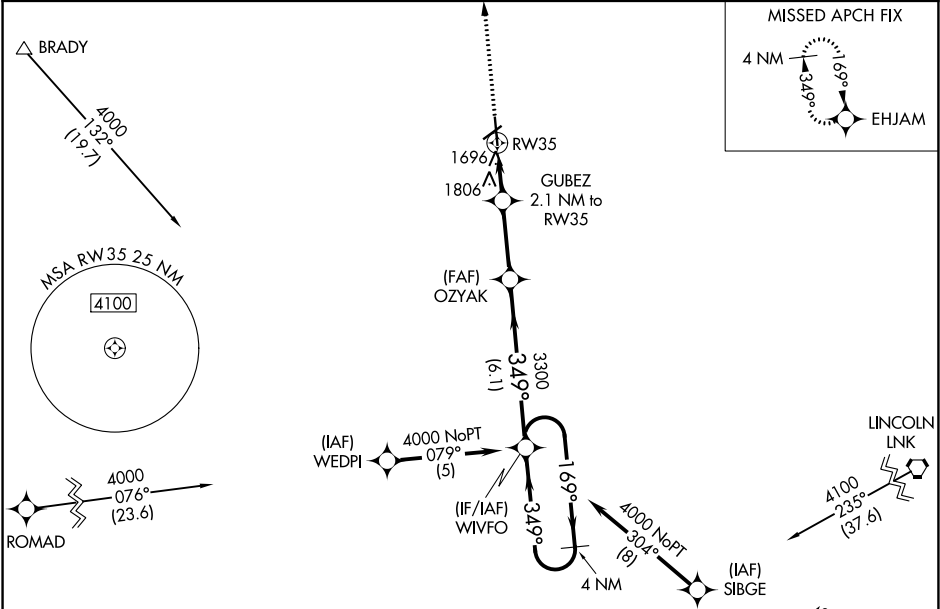

4000	EHJAM	VGSI and RNAV glidepath not coincident (VGSI 3.00/TCH 40).			
		GUBEZ 2.1 NM to RW35	OZYAK	WIVFO	4 NM Holding Pattern
		1.1 NM to RW35	2380	3300	GP 3.00° TCH 45
		1.1 NM	1 NM	2.8 NM	6.1 NM
CATEGORY	A	B	C	D	
LPV DA	1920-¾	250 (300-¾)		NA	
LNAV/VNAV DA	2004-1¼	334 (400-1¼)		NA	
LNAV MDA	2060-1	390 (400-1)	2060-1½ 390 (400-1½)	NA	
CIRCLING	2120-1 450 (500-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA	

NC-2, 03 SEP 2026 to 01 OCT 2026

NC-2, 03 SEP 2026 to 01 OCT 2026