

WAAS
CH **86333**
W09A

APP CRS
095°

Rwy Ldg
TDZE **4086**
Apt Elev **4094**

RNAV (GPS) RWY 9

NORTH BIG HORN COUNTY (U68)


▼

NA

Baro-VNAV NA when using Greybull altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 49°C. When Rwy 9 VGSi inop, Straight-in and Circling minimums NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Greybull altimeter setting and increase all DA 87 feet and all LPV and LNAV/VNAV visibility 1/8 mile, increase all MDA 100 feet and LNAV Cats C/D visibility 3/8 mile and increase Circling Cat C visibility 1/4 mile. Circling NA to Rwy 16 and 34.

MISSED APPROACH: Climb to 4600 then climbing right turn to 8500 direct SEZJI and hold.

AWOS-3 119.925	SALT LAKE CENTER 133.25 285.6	UNICOM 123.0 (CTAF) 1
--------------------------	---	---------------------------------

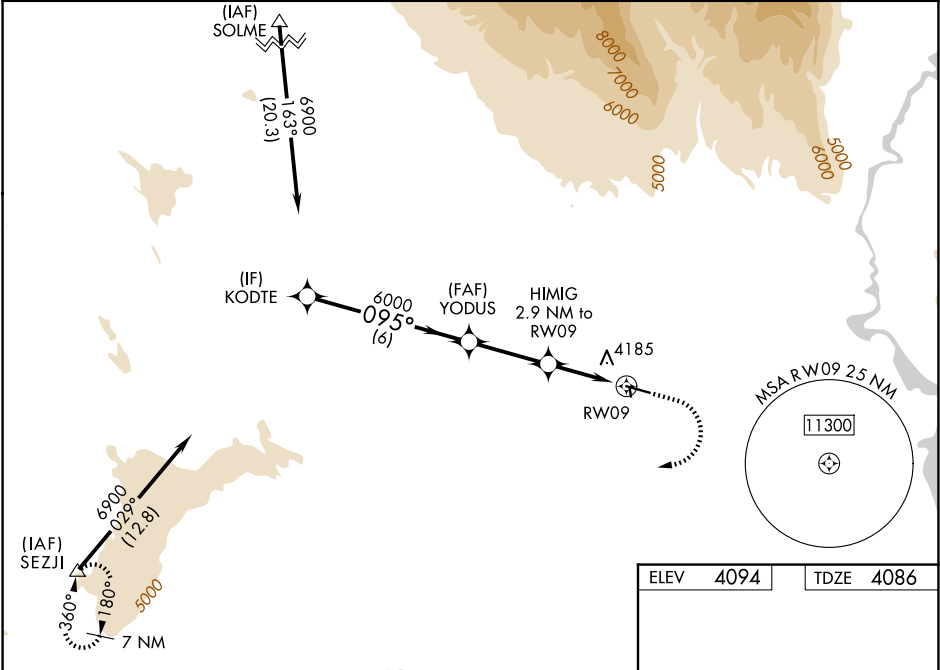

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 40).

4600

8500

SEZJI

△

KODTE

6900

095°

6000

YODUS

6000

HIMIG

2.9 NM to RWY 09

RWY 09

* 5060

* LNAV only.

GP 3.00°

TCH 55

6 NM

2.9 NM

2.9 NM

CATEGORY	A	B	C	D
LPV DA		4336-1	250 (300-1)	
LNAV/VNAV DA		4344-1	258 (300-1)	
LNAV MDA		4440-1	354 (400-1)	
CIRCLING	4520-1 426 (500-1)	4680-1 586 (600-1)	4940-2½ 846 (900-2½)	5260-3 1166 (1200-3)

REIL Rwy 9 and 27 1

MIRL Rwy 9-27 1