

WAAS CH 78408 W05A	APP CRS 053°	Rwy Ldg 5500 TDZE 878 Apt Elev 878
--	------------------------	---

RNAV (GPS) RWY 5


LINCOLN COUNTY RGNL (IPJ)

RNP APCH.

- T** When local altimeter setting not received, use Charlotte altimeter setting: increase LPV DA to 1395 feet, LNAV/VNAV DA to 1463 feet and visibility LNAV/VNAV $\frac{1}{4}$ SM; increase all MDAs 80 feet and visibility Cats C and D $\frac{1}{4}$ SM. Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using Charlotte altimeter setting.
- A** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C.

MISSED APPROACH: Climb to 3000 direct JIVOM and hold.

AWOS-3 119.675	CHARLOTTE APP CON 134.75 257.2	CLNC DEL (GCO) 124.9	UNICOM 123.05 (CTAF) 1
--------------------------	--	--------------------------------	----------------------------------

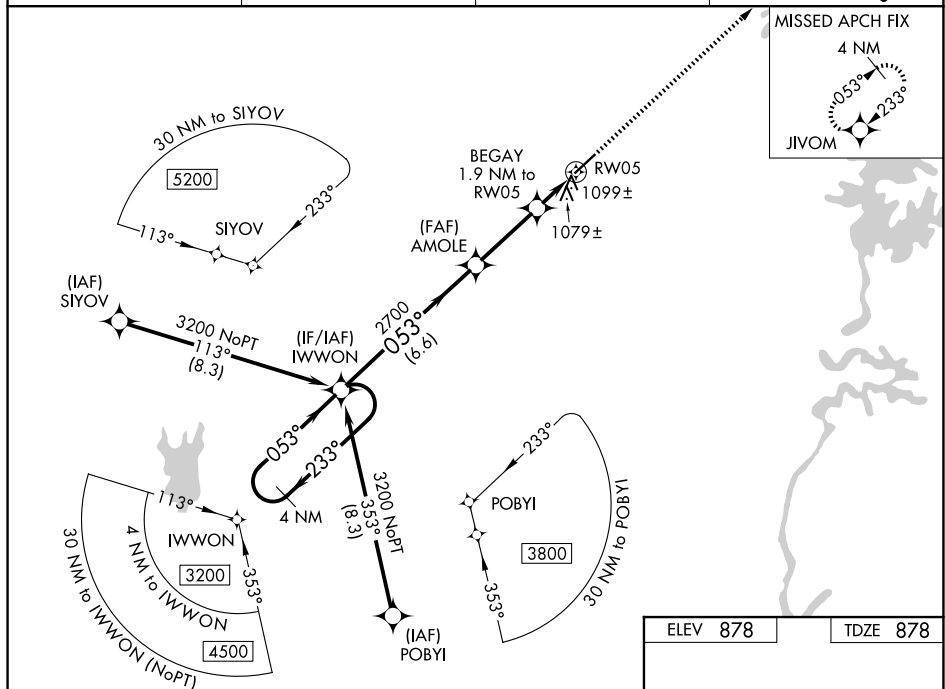


MISSED APCH FIX

4 NM

053°

233°

JIVOM

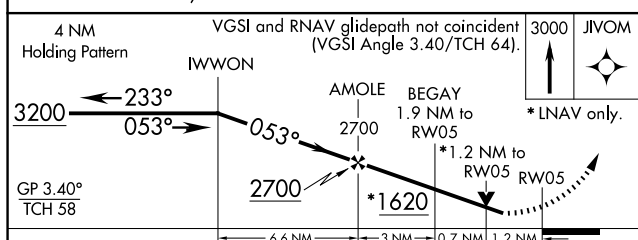

CATEGORY	A	B	C	D
LPV DA	1332-1 $\frac{3}{8}$	454 (500-1 $\frac{3}{8}$)		NA
RNAV/ VNAV DA	1400-1 $\frac{1}{2}$	522 (600-1 $\frac{1}{2}$)		NA
RNAV MDA	1360-1	482 (500-1)	1360-1 $\frac{3}{8}$	482 (500-1 $\frac{3}{8}$)
CIRCLING	1400-1 522 (600-1)	1440-1 562 (600-1)	1660-2 $\frac{1}{4}$ 782 (800-2 $\frac{1}{4}$)	1660-2 $\frac{1}{2}$ 782 (800-2 $\frac{1}{2}$)

