

APP CRS
012°

Rwy Ldg
TDZE
80

Apt Elev
80

RNAV (GPS) RWY 1
LAKE CITY MUNI/CJ EVANS FLD (51J)


RNP APCH - GPS.

▼
NA

Procedure NA at night. Use CKI altimeter setting; when not received, use FLO altimeter setting and increase all MDAs 40 feet and Circling visibility Cats B/C ¼ SM. Rwy 1 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000 direct INECA and hold.

CKI AWOS-3 124.775	FLORENCE APP CON ★ 135.25 316.15	CTAF 122.9 0
------------------------------	--	------------------------

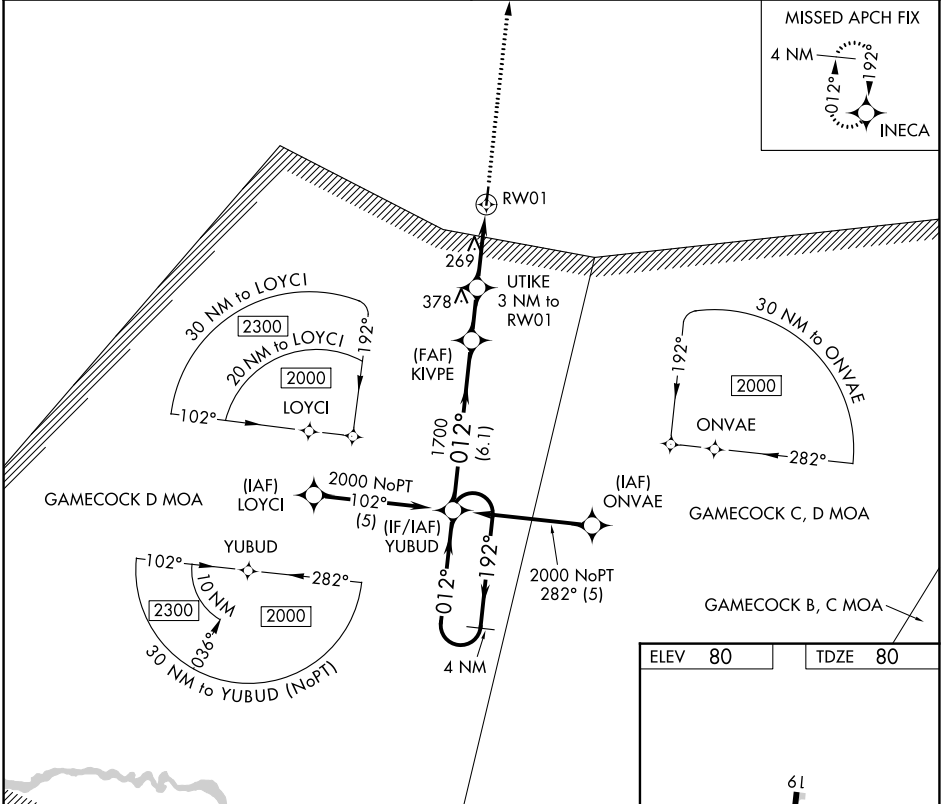

MISSED APCH FIX

4 NM

012°

192°

INECA

4 NM Holding Pattern YUBUD

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).

2000

INECA

192°

012°

012°

KIVPE

UTIKE 3 NM to RW01

3.04°

TCH 40

1700

1060

RW01

6.1 NM

1.9 NM

3 NM

CATEGORY	A	B	C	D
LNNAV MDA	560-1	480 (500-1)	560-1½ 480 (500-1½)	NA
CIRCLING	660-1 580 (600-1)	880-1 800 (800-1)	880-2¼ 800 (800-2¼)	NA

ELEV 80

TDZE 80

61

3700 X 75

144

012°

MIRL Rwy 1-19 0