

VORTAC EHF	APP CRS	Rwy Ldg	N/A
115.4	269°	TDZE	N/A
Chan 101		Apt Elev	425



VOR-A

SHAFTER-MINTER FLD (MIT)

NA Circling to Rwy 17, 35, 8 and 26 NA at night. When local altimeter setting not received, use Bakersfield altimeter setting and increase all MDAS 40 feet and increase Cat C visibility to 1¾.

MISSED APPROACH: Climb to 4000 on EHF VORTAC R-269 to SCRAP INT/EHF 14.7 DME and hold, continue climb-in-hold to 4000.

AWOS-3 121.125	BAKERSFIELD APP CON ★ 126.45 270.3	CTAF 122.9
--------------------------	--	----------------------

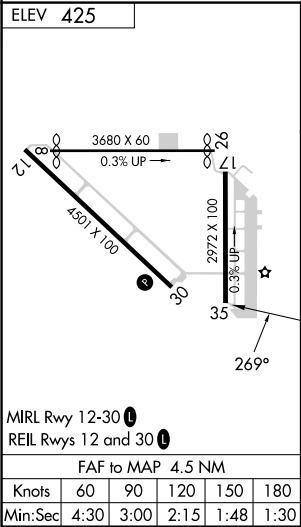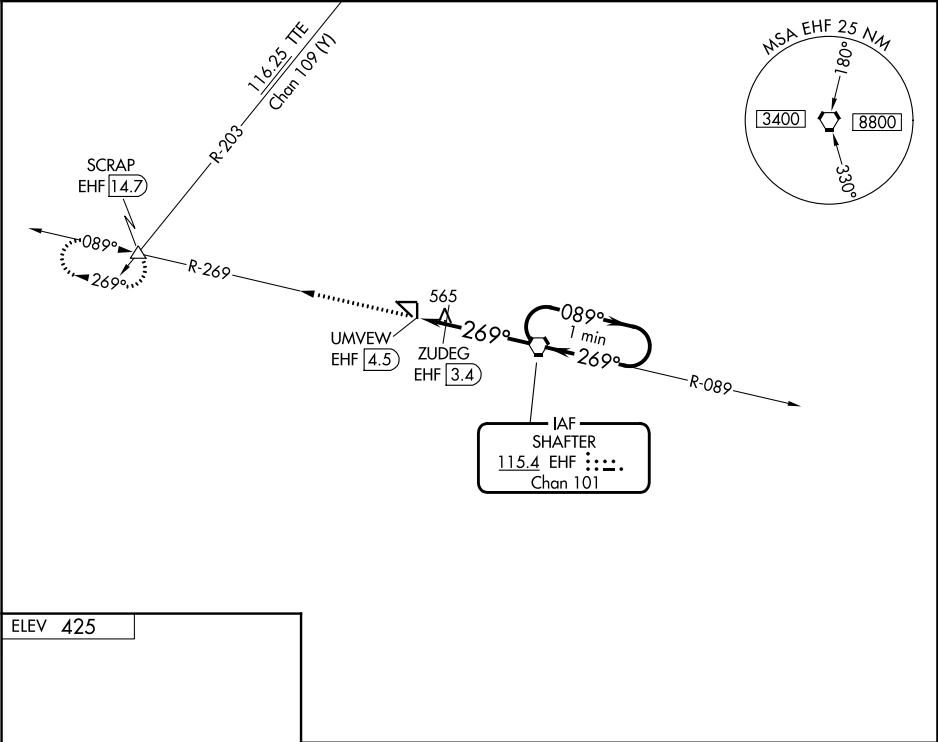

4000 EHF R-269		SCRAP △		EHF VORTAC		One Minute Holding Pattern	
UMVEW EHF 4.5		ZUDEG EHF 3.4		2600		089° → 2900 ← 269°	
1000*		269°		2600		*1040 when using Bakersfield altimeter setting.	
1.1 NM		3.4 NM					
CATEGORY	A		B		C		D
CIRCLING	1000-1		575 (600-1)		1000-1½ 575 (600-1½)		NA
ZUDEG FIX MINIMUMS							
CIRCLING	900-1		475 (500-1)		940-1½ 515 (600-1½)		NA