WAAS	APP CRS	Rwy Ldg	5121
CH 69641	023°	TDZE	1936
W02A		Apt Elev	1978

RNAV (GPS) RWY 2
MESQUITE (67L)

RNP APCH.

VDP NA when using St George altimeter setting. When local altimeter setting not received, use St. George altimeter setting and increase all MDAs 200 feet and LP* and LNAV* Cats C/D visibility ⅝ SM. Circling NA for Cat D west of Rwy 2-20. Circling Rwy 20 NA at night.

MISSED APPROACH: Climb to 9300 direct ZEXOP and climbing right turn on track 068° to UTI VOR/DME and hold, continue climb-in-hold to 9300.
*Missed approach requires minimum climb of 258 feet per NM to 6200.

AWOS-3	LOS ANGELES CENTER	UNICOM
118.525	124.2 343.6	122.8 (CTAF) L

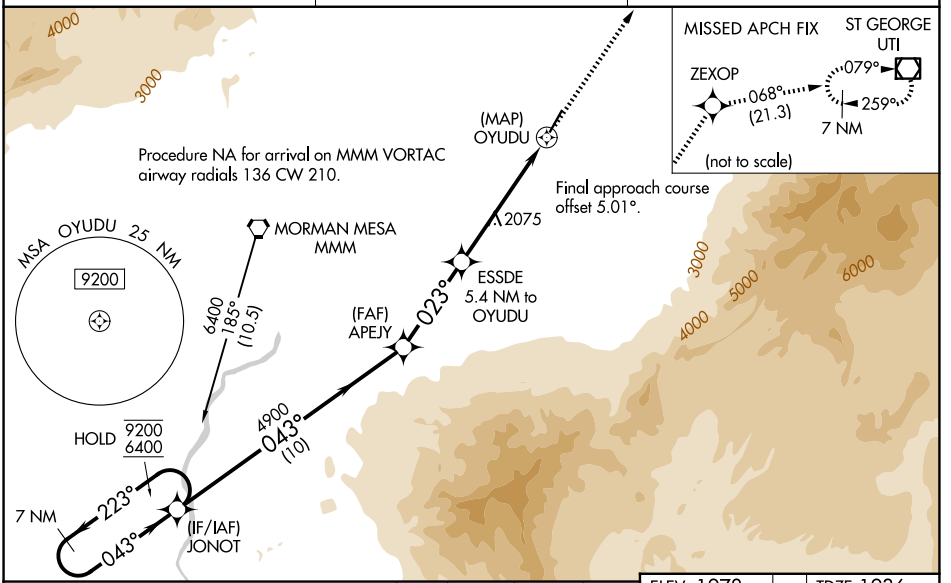

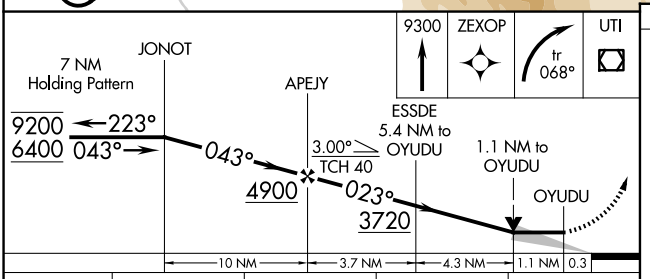

CATEGORY	A	B	C	D
LP MDA*	2340-1 404 (400-1)		2340-1⅛ 404 (400-1⅛)	
LP MDA	3080-1¼ 1144 (1200-1¼)	3080-1½ 1144 (1200-1½)	3080-3 1144 (1200-3)	
LNAV MDA*	2340-1 404 (400-1)		2340-1⅛ 404 (400-1⅛)	
LNAV MDA	3140-1¼ 1204 (1200-1¼)	3140-1½ 1204 (1200-1½)	3140-3 1204 (1200-3)	
CIRCLING	3140-1¼ 1162 (1200-1¼)	3140-1½ 1162 (1200-1½)	3140-3 1162 (1200-3)	

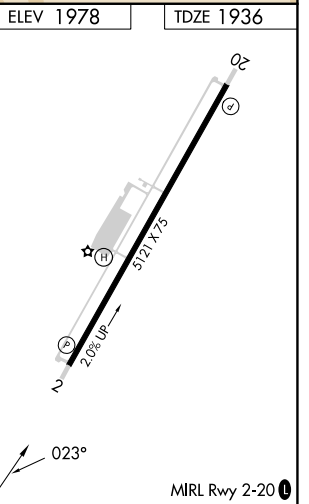

SW-4, 03 SEP 2026 to 01 OCT 2026
SW-4, 03 SEP 2026 to 01 OCT 2026