APP CRS	Rwy Ldg	3600
292°	TDZE	1607
	Apt Elev	1607

RNAV (GPS) RWY 29
HARVEY MUNI (5H4)

RNP APCH - GPS.

T
A NA

Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Baro-VNAV NA when using DVL altimeter setting. When local altimeter setting not received, use DVL altimeter setting: increase LNAV/VNAV DA to 2230 feet and all visibilities ⅜ SM; increase all MDAs 140 feet and LNAV visibility Cat C ⅜ SM and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3400 direct NUTFO and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.825	135.25 256.7	122.8 (CTAF) L

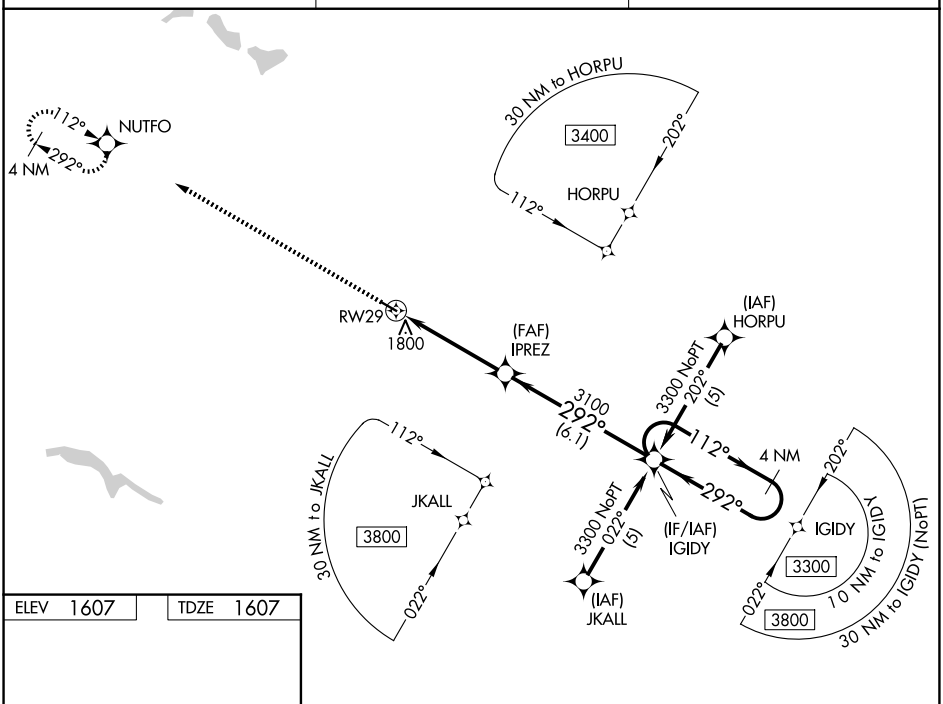

ELEV 1607	TDZE 1607

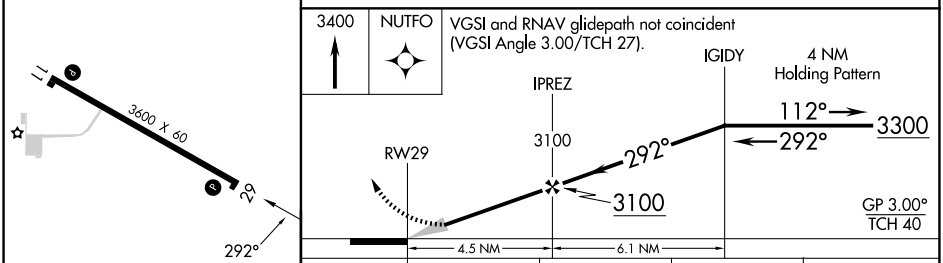

CATEGORY	A	B	C	D
LNAV/VNAV DA	2100-1⅜ 493 (500-1⅜)			NA
LNAV MDA	2100-1 493 (500-1)		2100-1⅜ 493 (500-1⅜)	NA
CIRCLING	2120-1 513 (600-1)		2300-2 693 (700-2)	NA

MIRL Rwy 11-29 L

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026