WAAS	APP CRS	Rwy Ldg	7400
CH 93903	016°	TDZE	667
W02A		Apt Elev	705

RNAV (GPS) RWY 2

CONCORD-PADGETT RGNL (JQF)

RNP APCH.

Rwy 2 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 45°C.

MISSED APPROACH: Climb to 4000 direct LEEMO and hold, continue climb-in-hold to 4000.

ATIS	CHARLOTTE APP CON	CONCORD TOWER ★	GND CON	UNICOM
133.675	128.325 307.8	134.65 (CTAF) L	121.85	122.95

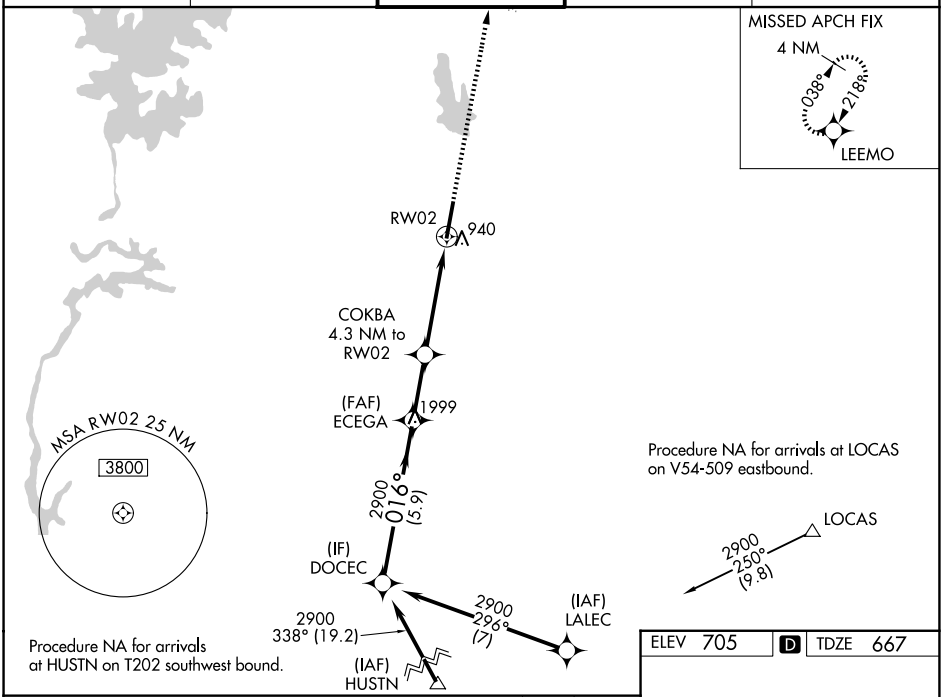

ELEV 705 D TDZE 667

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 69).

4000 LEEMO

*LNAV only.

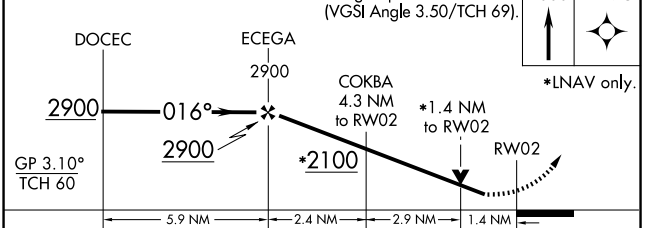

CATEGORY	A	B	C	D
LPV DA	986-1⅛ 319 (300-1⅛)			
LNAV/VNAV DA	1220-1⅞ 553 (600-1⅞)			
LNAV MDA	1240-1 573 (600-1)		1240-1⅝ 573 (600-1⅝)	
CIRCLING	1300-1 595 (600-1)		1480-2¼ 775 (800-2¼)	1480-2½ 775 (800-2½)

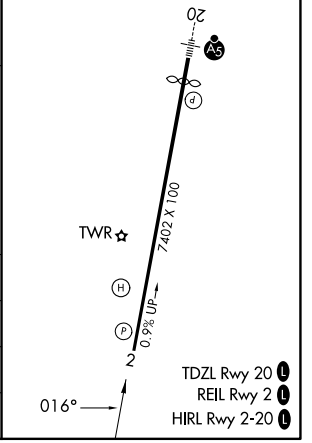

SE-2, 03 SEP 2026 to 01 OCT 2026
SE-2, 03 SEP 2026 to 01 OCT 2026