RNAV (GPS) RWY 20

CONCORD-PADGETT RGNL (JQF)

WAAS	APP CRS		
CH 56499	196°	Rwy Ldg	6350
W20A		TDZE	699
		Apt Elev	704

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 20 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LNAV Cats A and B visibility to 1 SM and Cats C and D visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct LEEMO and hold.

ATIS	CHARLOTTE APP CON	CONCORD TOWER ★	GND CON	UNICOM
133.675	128.325 307.8	134.65 (CTAF) L	121.85	122.95

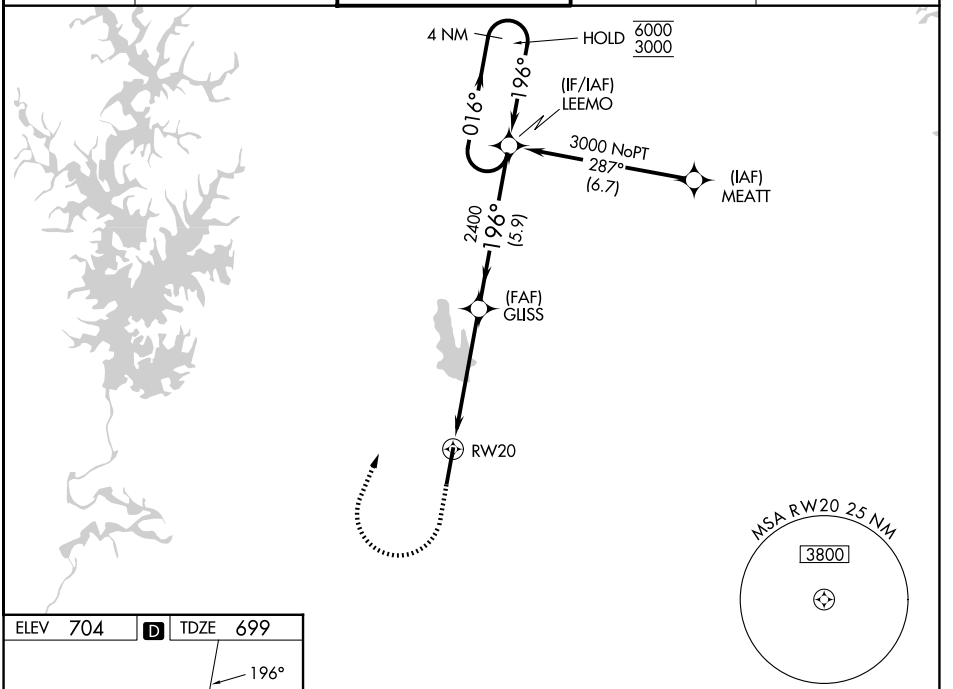

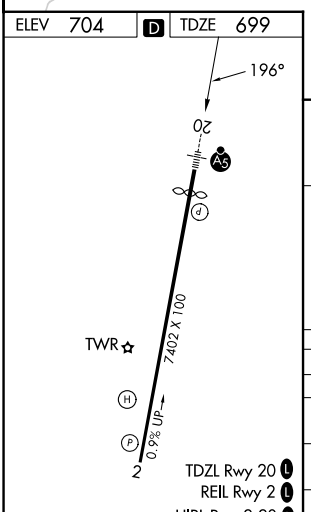

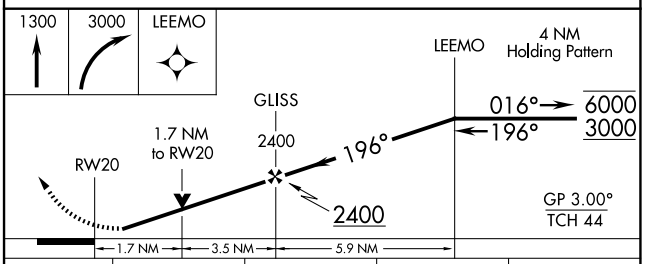

CATEGORY	A	B	C	D
LPV DA	1041-¾	342 (400-¾)		
LNAV/VNAV DA	1222-1	523 (600-1)		
LNAV MDA	1300-1	601 (600-1)	1300-1⅜	601 (600-1⅜)
CIRCLING	1300-1	596 (600-1)	1480-2¼ 776 (800-2¼)	1480-2½ 776 (800-2½)

SE-2, 03 SEP 2026 to 01 OCT 2026
SE-2, 03 SEP 2026 to 01 OCT 2026