

WAAS CH 61137 W36A	APP CRS 001°	Rwy Ldg TDZE 736 Apt Elev 738
--	------------------------	---



RNAV (GPS) RWY 36

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)

⚠ Baro-VNAV NA when using Champaign Urbana altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile and LNAV and Circling Cats C/D visibility 1⁄4 mile. Helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 3000 direct
ALADE and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) ①
--------------------------	---	---------------------------------

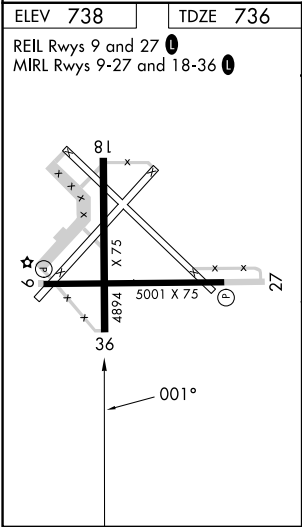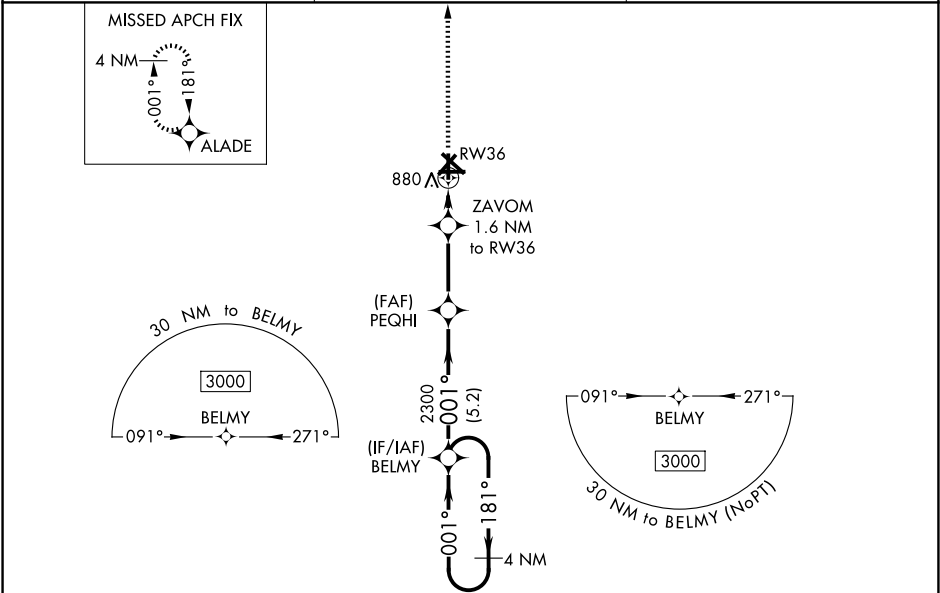

3000	ALADE				
*LNAV only	ZAVOM 1.6 NM to RW36	PEQHI 2300	BELMY	4 NM Holding Pattern	
	1280*	2300	181° →	← 001°	3000
	1.6 NM	3.2 NM	5.2 NM		GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	986-1 250 (300-1)				
LNAV/VNAV DA	1147-1 3⁄8 411 (500-1 3⁄8)				
LNAV MDA	1140-1 404 (500-1)		1140-1 3⁄8 404 (500-1 3⁄8)		
CIRCLING	1220-1 482 (500-1)	1280-1 542 (600-1)	1380-1 3⁄4 642 (700-1 3⁄4)	1420-2 1⁄4 682 (700-2 1⁄4)	