


WAAS CH 56642 W24A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	4494 45 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24
WAINWRIGHT (AWI) (PAWI)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.		MISSED APPROACH: Climb to 4000 direct OZYIB and hold, continue climb-in-hold to 4000	
ASOS-3 132.25	ANCHORAGE CENTER 135.3 239.25	BARROW RADIO 122.5	CTAF 122.8

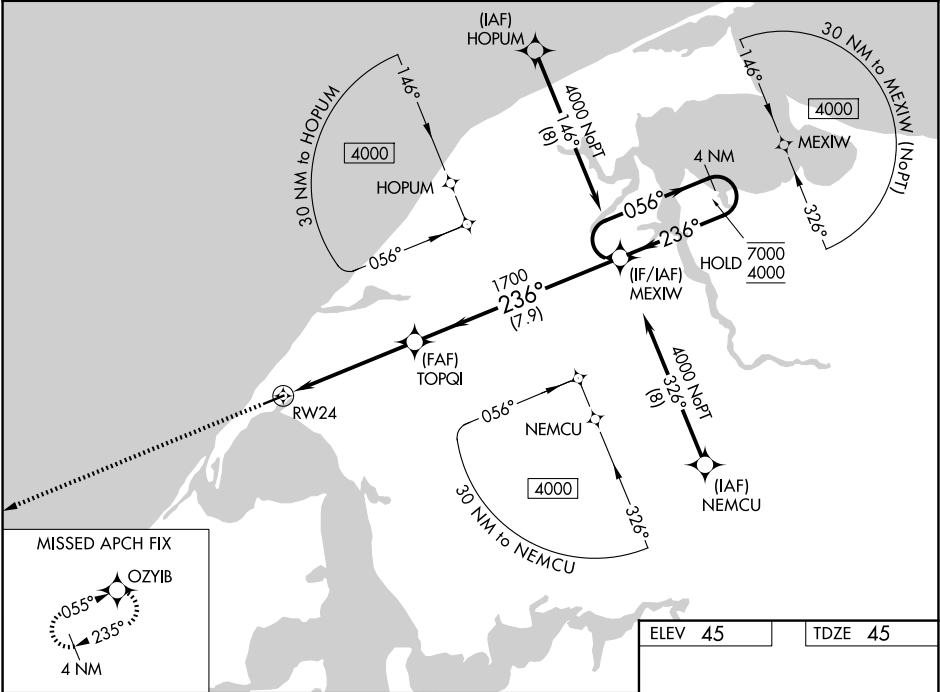

4000 ↑ OZYIB		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		MEXIW 4 NM Holding Pattern	
RW24		TOPQI 1700		7000 4000	
1.4 NM to RW24		1700		GP 3.00° TCH 45	
1.4 NM		3.7 NM		7.9 NM	
CATEGORY	A	B	C	D	
LPV DA	295-1		250 (300-1)		
LNAV/VNAV DA	295-1		250 (300-1)		
LNAV MDA	520-1	475 (500-1)	520-1 3/8	475 (500-1 3/8)	
CIRCLING	520-1	475 (500-1)	520-1 1/2 475 (500-1 1/2)	600-2 555 (600-2)	

