# RNAV (GPS) RWY 18

TAMPA EXEC (VDF)

| APP CRS | Rwy Ldg | 3219 |
|---|---|---|
| 184° | TDZE | 19 |
| | Apt Elev | 21 |

RNP APCH.

When local altimeter not received, use Tampa Intl altimeter setting and increase all MDA 40 feet. Straight-in Rwy 18 NA at night, Circling Rwy 18, 36 NA at night. Rwy 18 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct COLUD and hold, continue climb-in-hold to 3000.

| AWOS-3 | TAMPA APP CON | UNICOM |
|---|---|---|
| 121.125 | 119.9 290.3 | 122.7 (CTAF) L |

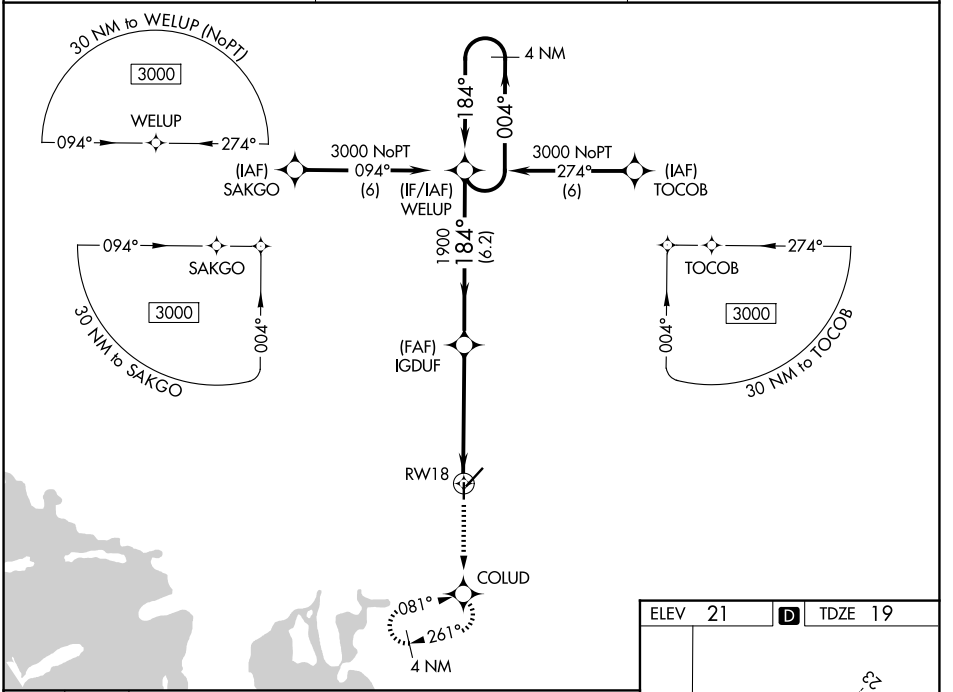


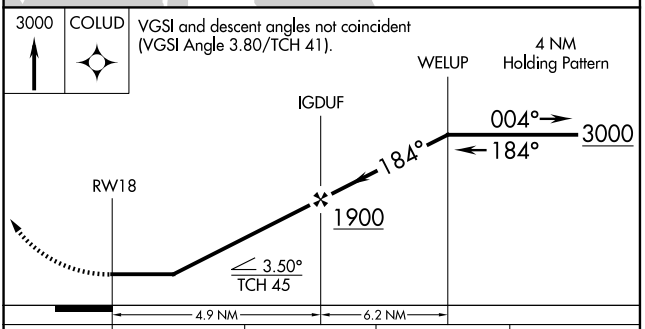


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA | 580-1 561 (600-1) | | NA | |
| CIRCLING | 580-1 559 (600-1) | 760-1 739 (800-1) | NA | |

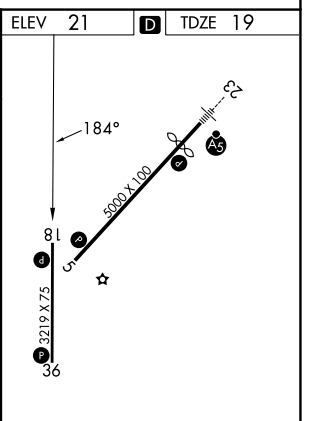


REIL Rwys 5, 18, and 36 L
MIRL Rwys 5-23 and 18-36 L



SE-3, 03 SEP 2026 to 01 OCT 2026
SE-3, 03 SEP 2026 to 01 OCT 2026