WAAS CH **82418** **W18A** | APP CRS **186°** | Rwy Ldg **5700** TDZE **6763** Apt Elev **6763**

RNAV (GPS) RWY 18

PANGUITCH MUNI (U55)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Bryce Canyon altimeter setting and increase all DA 149 feet and all MDA 160 feet, increase LPV visibility ¼ mile and increase LNAV visibility and Circling Cat B visibility ¼ mile. Baro-VNAV and VDP NA with Bryce Canyon altimeter setting.

-27°C

MISSED APPROACH: Climb to12500 direct OPOYA and on track 216° to POBME and hold, continue climb-in-hold 12500.

AWOS-3	SALT LAKE CENTER	CTAF
133.125	133.6 269.25	122.9 L

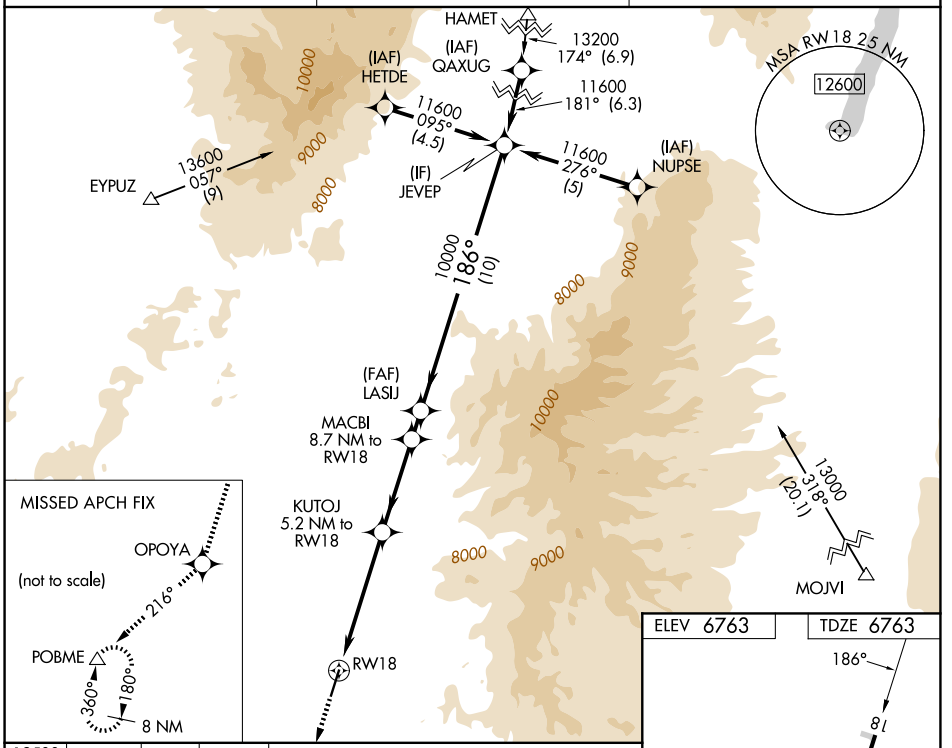

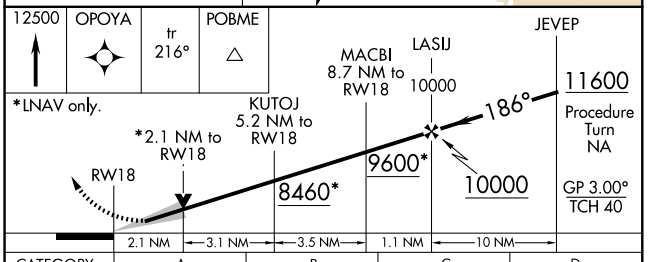

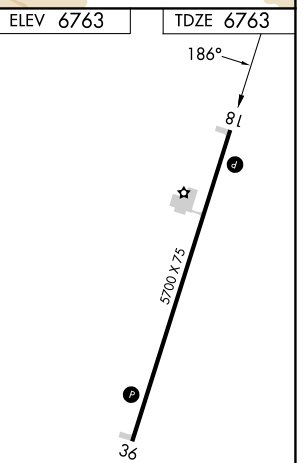

CATEGORY	A	B	C	D
LPV DA	6963-1	200 (200-1)	NA	
LNAV/VNAV DA	7331-2	568 (600-2)	NA	
LNAV MDA	7460-1	697 (700-1)	NA	
CIRCLING	7460-1	697 (700-1)	NA	

MIRL Rwy 18-36 L
REIL Rwys 18 and 36 L

SW-4, 03 SEP 2026 to 01 OCT 2026
SW-4, 03 SEP 2026 to 01 OCT 2026