

WAAS CH 86640 W14A	APP CRS 144°	Rwy Ldg TDZE Apt Elev	5000 18 18
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 14


PLATINUM (PTU)(PAPM)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using TOG/PATG altimeter setting. When local altimeter setting not received, use TOG/PATG altimeter setting and increase LPV DA to 371 feet; increase LNAV/VNAV DA to 424 feet and all visibilities ¼ SM; increase all MDAs 120 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 500 then climbing right turn to 2500 direct FELTI and hold.

AWOS-3P 118.375	ANCHORAGE CENTER 124.2 251.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

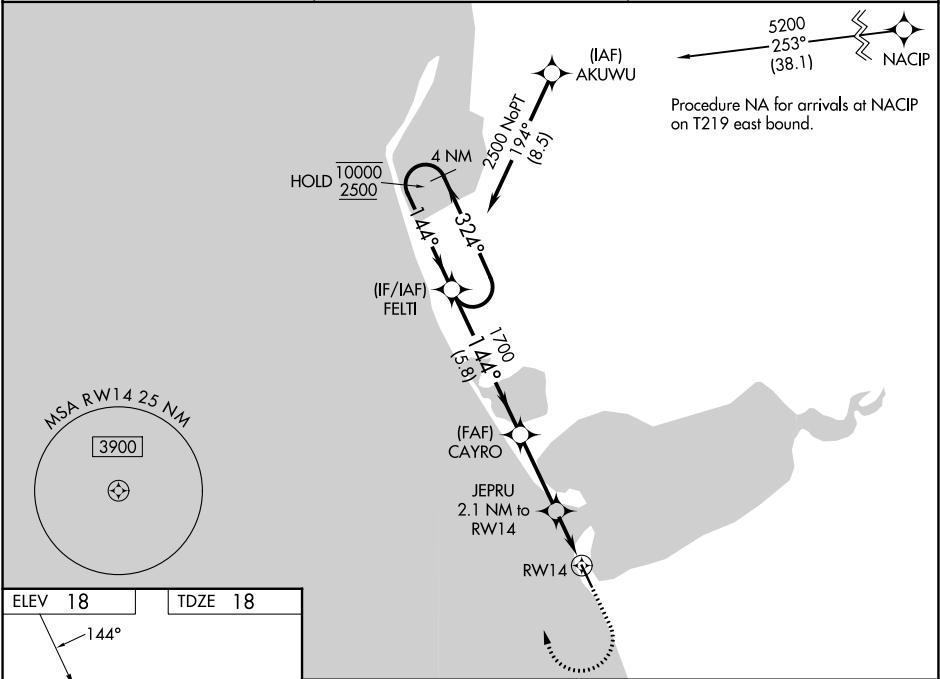

ELEV 18

TDZE 18

144°

500 X 7.5

32

MIRL Rwy 14-32 0

4 NM Holding Pattern		FELTI	CAYRO	JEPRU	500	2500	FELTI
10000 ← 324° 2500 → 144°		1700		2.1 NM to RW14	1.1 NM to RW14	1.1 NM to RW14	
GP 3.00° TCH 40		1700		740			
		5.8 NM		3 NM	1.1 NM	1.1 NM	
CATEGORY	A	B	C	D			
LPV DA	268-1		250 (300-1)	NA			
LNAV/VNAV DA	321-1		303 (400-1)	NA			
LNAV MDA	400-1		382 (400-1)	400-1½ 382 (400-1½)	NA		
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	NA			

AK, 03 SEP 2026 to 29 OCT 2026

AK, 03 SEP 2026 to 29 OCT 2026