| WAAS | APP CRS | Rwy Ldg | 3300 |
|---|---|---|---|
| CH 77841 | 155° | TDZE | 386 |
| W16A | | Apt Elev | 386 |

# RNAV (GPS) RWY 16

REEDLEY MUNI (O32)

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 16-34. Baro-VNAV and VDP NA when using Fresno Yosemite Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fresno Yosemite Intl altimeter setting: increase all DAs 41 feet and all visibilities ⅛ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3100 direct DEICE and hold, continue climb-in-hold to 3100.

| AWOS-3PT | FRESNO APP CON | UNICOM |
|---|---|---|
| 120.175 | 132.35 323.25 | 122.7 (CTAF) L |

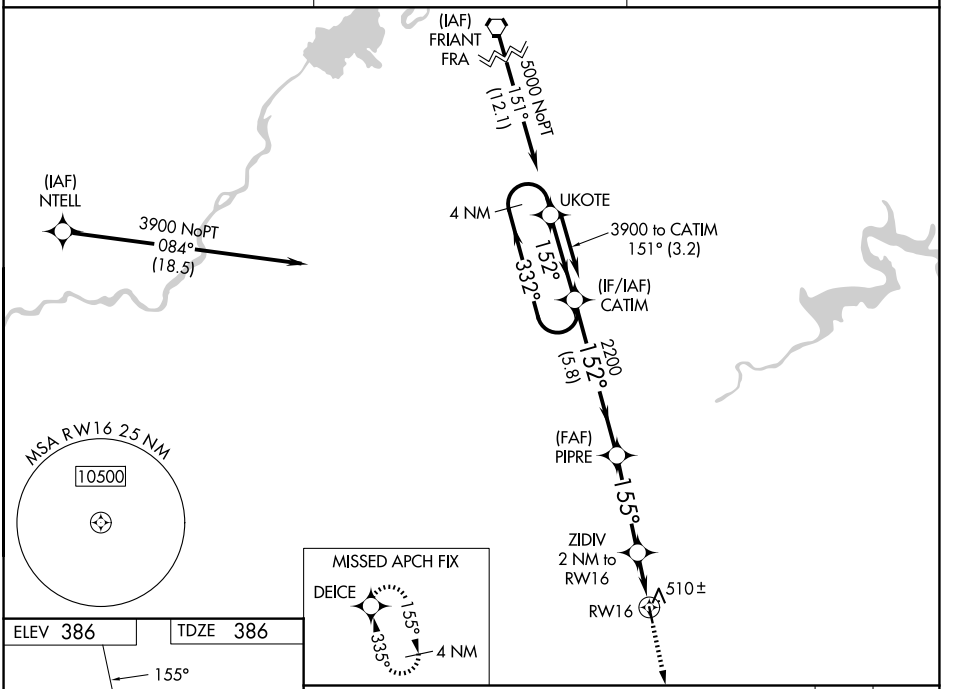


ELEV 386 | TDZE 386

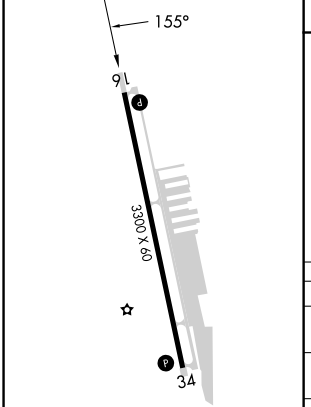


MIRL Rwy 16-34 L

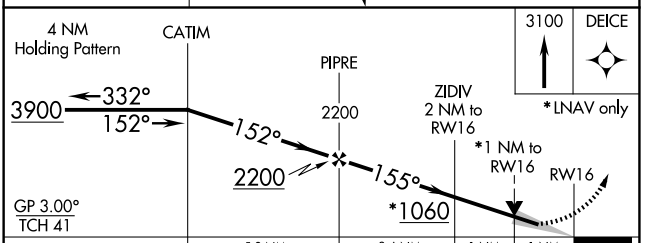


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 636-¾ | 250 (300-¾) | | NA |
| LNAV/VNAV DA | 672-⅞ | 286 (300-⅞) | | NA |
| LNAV MDA | 760-1 | 374 (400-1) | | NA |
| CIRCLING | 800-1<br>414 (500-1) | 840-1<br>454 (500-1) | | NA |



SW-2, 03 SEP 2026 to 01 OCT 2026
SW-2, 03 SEP 2026 to 01 OCT 2026