

APP CRS
056°

Rwy Ldg
TDZE
365
Apt Elev
365

RNAV (GPS) RWY 5
BEAVER (WBQ)(PAWB)

RNP APCH-GPS

▼

NA


Rwy 5 helicopter visibility reduction below ¾ SM NA.
Use FYU/PFYU altimeter setting; when not received,
procedure NA.

MISSED APPROACH: Climb to 3000 direct DUTKE
and hold.

FYU/PFYU AWOS-3P
125.8

FAIRBANKS RADIO
122.05 122.15

CTAF
122.9 0

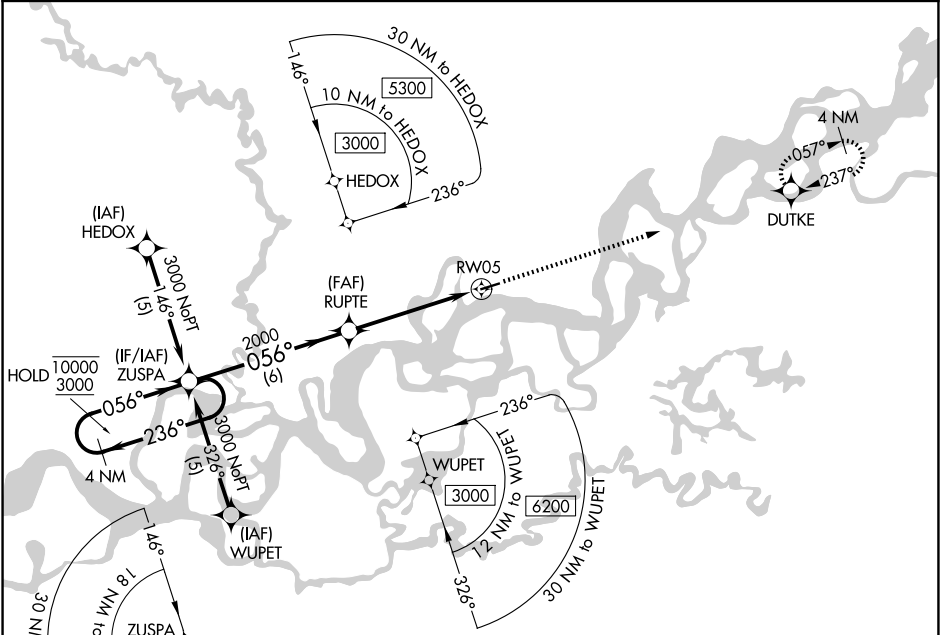

ELEV 365

TDZE 365

4 NM Holding Pattern

ZUSPA

RUPTF

RW05

DUTKE

3000

10000

3000

236°

056°

056°

3.03°

TCH 40

2000

6 NM

5 NM

3934 X 75

056°

CATEGORY	A	B	C	D
LNAV MDA	940-1	575 (600-1)	940-1½ 575 (600-1½)	NA
CIRCLING	940-1	575 (600-1)	940-1½ 575 (600-1½)	NA

MIRL Rwy 5-23 0