

WAAS CH 93902 W13A	APP CRS 126°	Rwy Ldg TDZE 1124 Apt Elev 1126
--	------------------------	---

RNAV (GPS) RWY 13

WILLMAR MUNI/JOHN L RICE FLD (BDH)

RNP APCH - GPS.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy's 3 and 21. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, LNAV Cats A and B to 1 SM and LNAV Cats C and D visibility to 1¾ SM. When local altimeter setting not received, use Olivia altimeter setting: increase LPV DA to 1379 feet; increase LNAV/VNAV DA to 1584 feet and all visibilities ½ SM; increase all MDAs 60 feet and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Olivia Rgnl altimeter setting.

MALSR

MISSED APPROACH:

Climb to 2800 direct HEPV and hold.

AWOS-3PT 118.75	MINNEAPOLIS CENTER 125.5 323.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

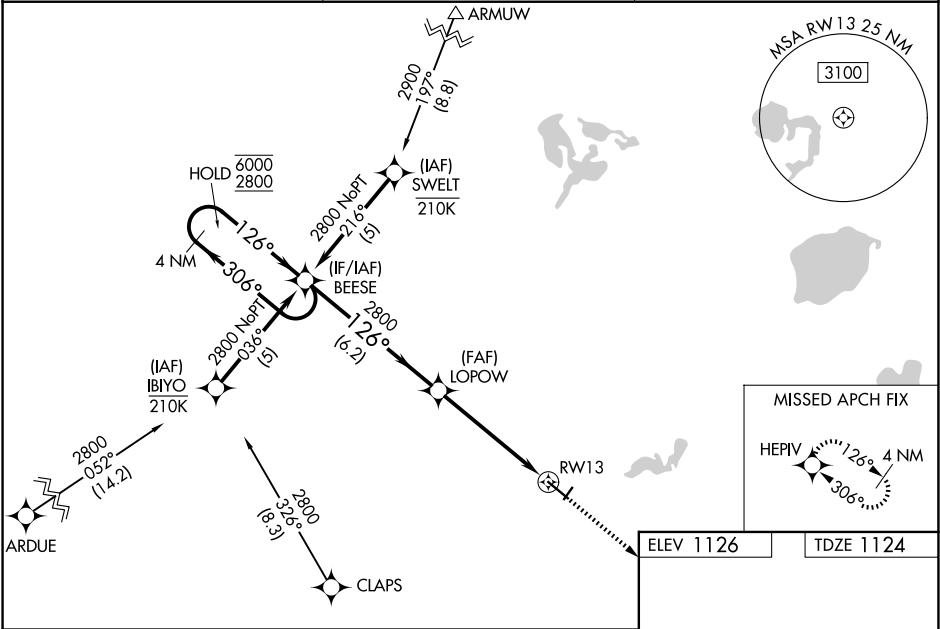

4 NM Holding Pattern

GP 3.00°
TCH 49

BEESE

LOPOW

HEPV

2800

1.3 NM to RWY13

RWY13

6.2 NM

3.8 NM

1.3 NM

CATEGORY	A	B	C	D
LPV DA	1324-¾ 200 (200-¾)			
LNAV/VNAV DA	1529-¾ 405 (500-¾)			
LNAV MDA	1600-¾ 476 (500-¾)	1600-1 476 (500-1)		
CIRCLING	1600-1 474 (500-1)	1660-1½ 534 (600-1½)	1960-2¾ 834 (900-2¾)	

HIRL Rwy 13-31 0

REIL Rwy 31 0