


|                                        |                        |                                                 |
|----------------------------------------|------------------------|-------------------------------------------------|
| WAAS<br>CH <b>53517</b><br><b>W05A</b> | APP CRS<br><b>051°</b> | Rwy Ldg<br>TDZE <b>34</b><br>Apt Elev <b>34</b> |
|----------------------------------------|------------------------|-------------------------------------------------|

RNAV (GPS) RWY 5

OKEECHOBEE COUNTY (OBE)

|                                                                                                                                                                          |                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                          | MISSED APPROACH: Climb to 2000 direct JABIT and hold. |
| ⚠ Rwy 5 helicopter visibility reduction below ¾ SM NA. Circling Rwy 14, 23, 32 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. |                                                       |

|                          |                                     |                                 |
|--------------------------|-------------------------------------|---------------------------------|
| AWOS-3<br><b>118.675</b> | MIAMI CENTER<br><b>132.25 370.9</b> | UNICOM<br><b>123.0</b> (CTAF) 📻 |
|--------------------------|-------------------------------------|---------------------------------|

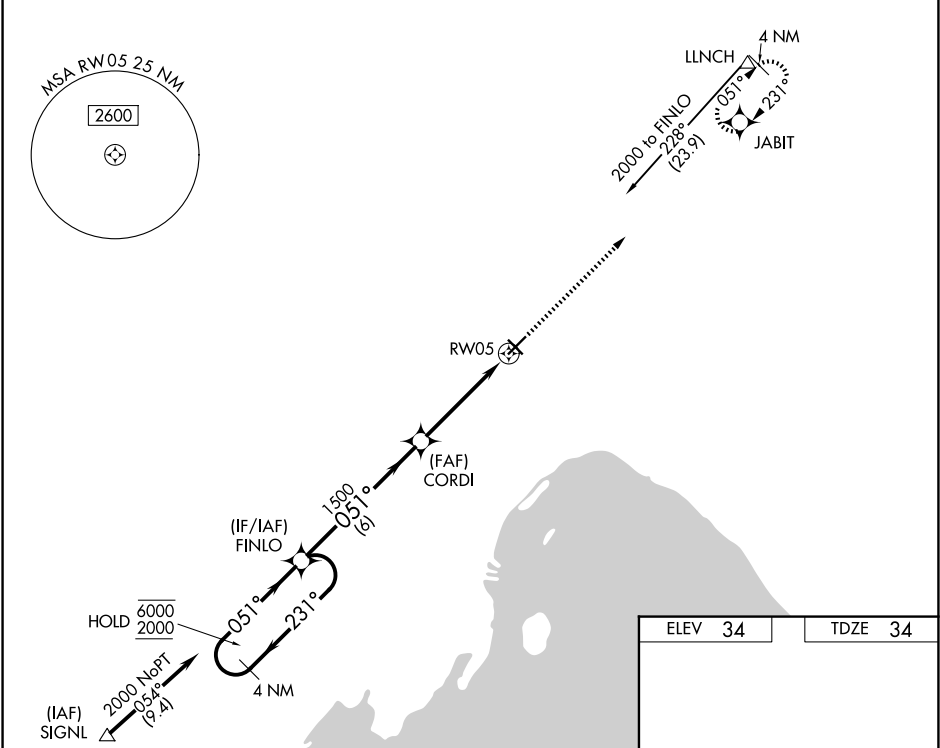

|                      |        |             |                        |                      |  |                |  |
|----------------------|--------|-------------|------------------------|----------------------|--|----------------|--|
| 4 NM Holding Pattern |        | FINLO       |                        | CORDI                |  | 2000 JABIT     |  |
| 6000 ← 231°          |        | 051° →      |                        | 051°                 |  | 1500           |  |
| 2000                 |        | GP 3.00°    |                        | 1500                 |  | 1.3 NM to RW05 |  |
| TCH 40               |        | 6 NM        |                        | 3.1 NM               |  | 1.3            |  |
| CATEGORY             | A      | B           | C                      | D                    |  |                |  |
| LPV DA               | 284-1  |             | 250 (300-1)            |                      |  |                |  |
| LNAV/ VNAV DA        | 455-1¼ |             | 421 (500-1¼)           |                      |  |                |  |
| LNAV MDA             | 480-1  | 446 (500-1) | 480-1¾                 | 446 (500-1¾)         |  |                |  |
| CIRCLING             | 500-1  | 466 (500-1) | 660-1¾<br>626 (700-1¾) | 660-2<br>626 (700-2) |  |                |  |

