RNAV (GPS) RWY 11

PAYNESVILLE MUNI (PEX)

WAAS	APP CRS	Rwy Ldg	3302
CH 50133	105°	TDZE	1183
W11A		Apt Elev	1183

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using LJF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LJF altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1704 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct UDALE and hold.

AWOS-3PT	MINNEAPOLIS CENTER	CTAF
120.35	125.5 323.1	122.9 L

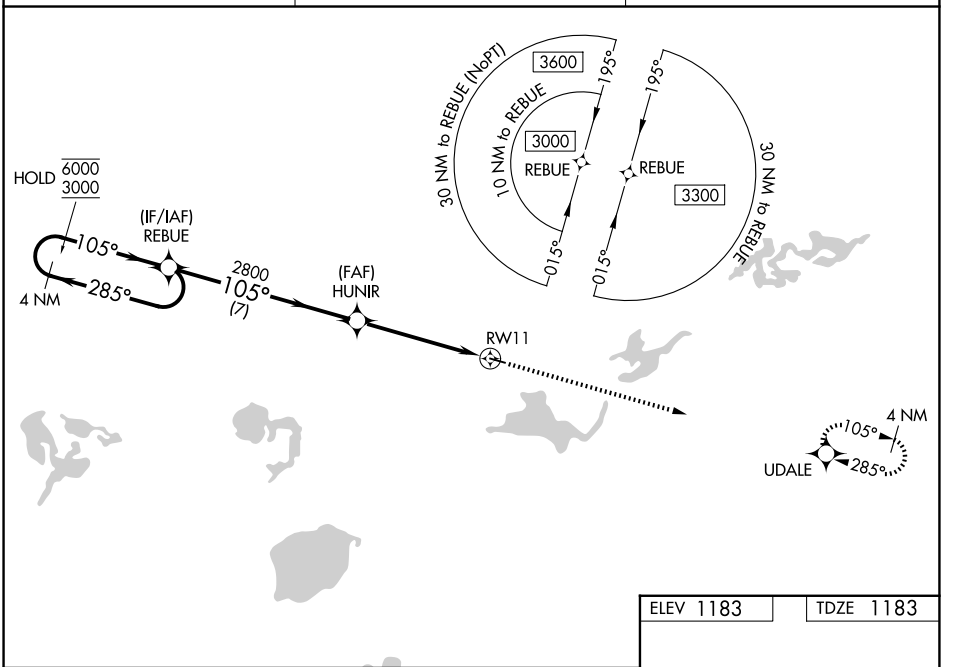

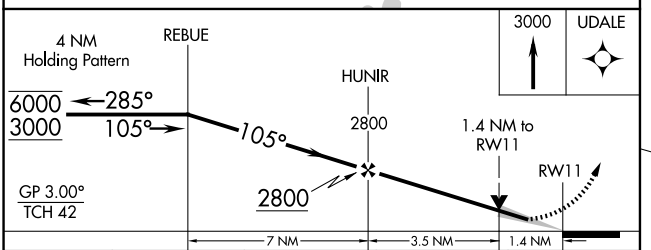

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1653-1⅜ 470 (500-1⅜)			NA
LNAV MDA	1680-1 497 (500-1)		1680-1⅜ 497 (500-1⅜)	NA
CIRCLING	1680-1 497 (500-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA



MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026