

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>65633</b><br><b>W29A</b> | APP CRS<br><b>285°</b> | Rwy Ldg<br>TDZE <b>1183</b><br>Apt Elev <b>1183</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 29

PAYNESVILLE MUNI (PEX)

RNP APCH - GPS.


▼

⚠

Baro-VNAV and VDP NA when using Lf altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter not received, use Lf altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1771 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MISSED APPROACH:  
Climb to 3000 direct  
REBUE and hold.

|                           |                                          |                      |
|---------------------------|------------------------------------------|----------------------|
| AWOS-3PT<br><b>120.35</b> | MINNEAPOLIS CENTER<br><b>125.5 323.1</b> | CTAF<br><b>122.9</b> |
|---------------------------|------------------------------------------|----------------------|

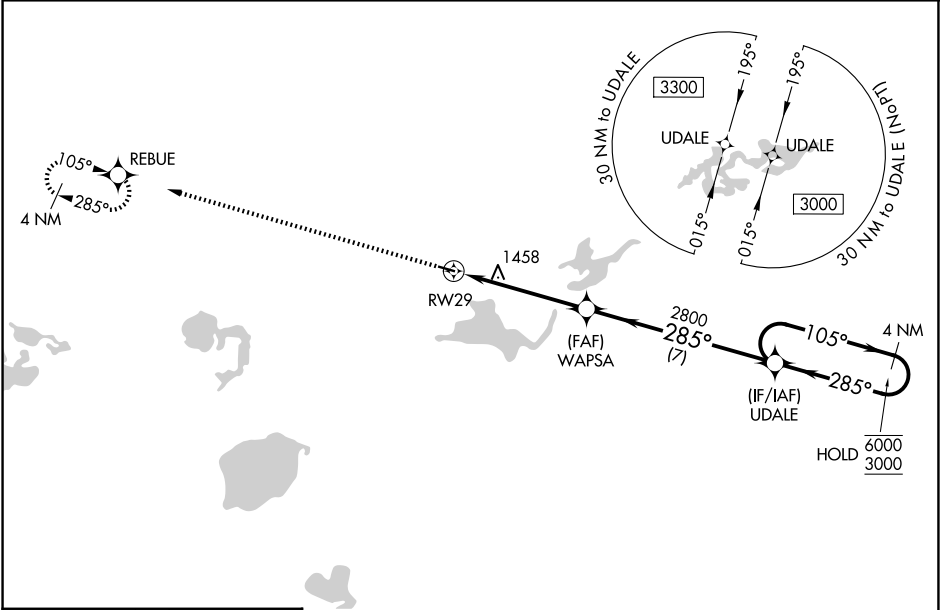

|                  |                  |
|------------------|------------------|
| ELEV <b>1183</b> | TDZE <b>1183</b> |
|------------------|------------------|

3000

REBUE

UDAL E

4 NM Holding Pattern

WAPSA

2800

1.5 NM to RW29

2800

285°

105°

6000

3000

GP 3.00°

TCH 45