

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>40141</b><br><b>W30A</b> | APP CRS<br><b>307°</b> | Rwy Ldg <b>3600</b><br>TDZE <b>1540</b><br>Apt Elev <b>1545</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 30



WESSINGTON SPRINGS (4X4)

NA

DME/DME RNP-0.3 NA. VDP NA when using Mitchell alimeter setting. When local altimeter setting not received use Mitchell alimeter setting: increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LP visibility Cat C ¼ SM, Circling visibility Cat B ¼ SM.

MISSED APPROACH: Climb to 4000 direct YUBUV and hold.

|                                           |                       |
|-------------------------------------------|-----------------------|
| MINNEAPOLIS CENTER<br><b>126.25 339.8</b> | CTAF<br><b>122.90</b> |
|-------------------------------------------|-----------------------|

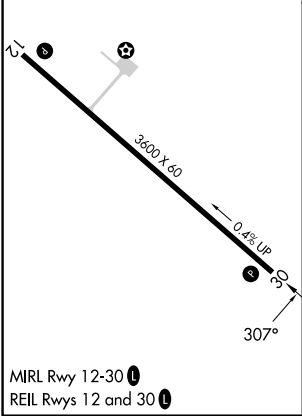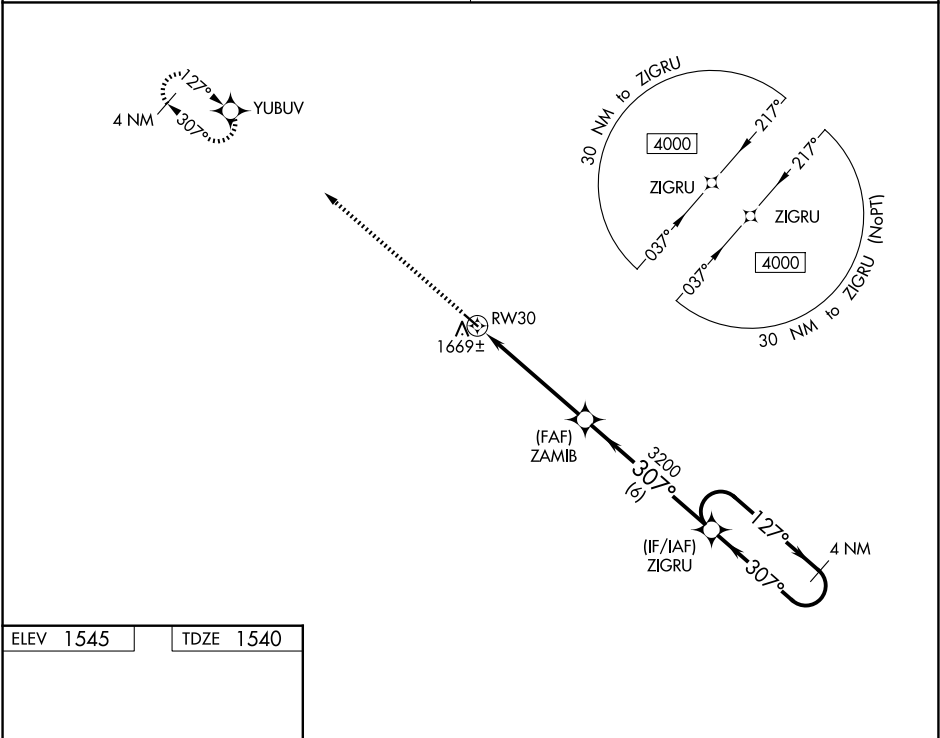

|          |                    |                                                                  |                        |                      |
|----------|--------------------|------------------------------------------------------------------|------------------------|----------------------|
| 4000     | YUBUV              | VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25). | ZIGRU                  | 4 NM Holding Pattern |
| 1 NM     | 4.1 NM             | 6 NM                                                             |                        |                      |
| CATEGORY | A                  | B                                                                | C                      | D                    |
| LP MDA   | 1880-1             | 340 (400-1)                                                      |                        | NA                   |
| LNAV MDA | 1940-1             | 400 (400-1)                                                      | 1940-1 ¼ 400 (400-1 ¼) | NA                   |
| CIRCLING | 2180-1 635 (700-1) | 2340-1 795 (800-1)                                               | 2720-3 1175 (1200-3)   | NA                   |