

WAAS CH 56637 W25A	APP CRS 248°	Rwy Ldg TDZE 966 Apt Elev 966
--	------------------------	---

RNAV (GPS) RWY 25

BLOYER FLD (Y72)


RNP APCH - GPS

NA

Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDAs 20 feet. Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct FOSAT and hold.

VOLK APP CON ★ 135.25 244.875	VOLK CTAF 127.5	CTAF 122.9
---	---------------------------	----------------------

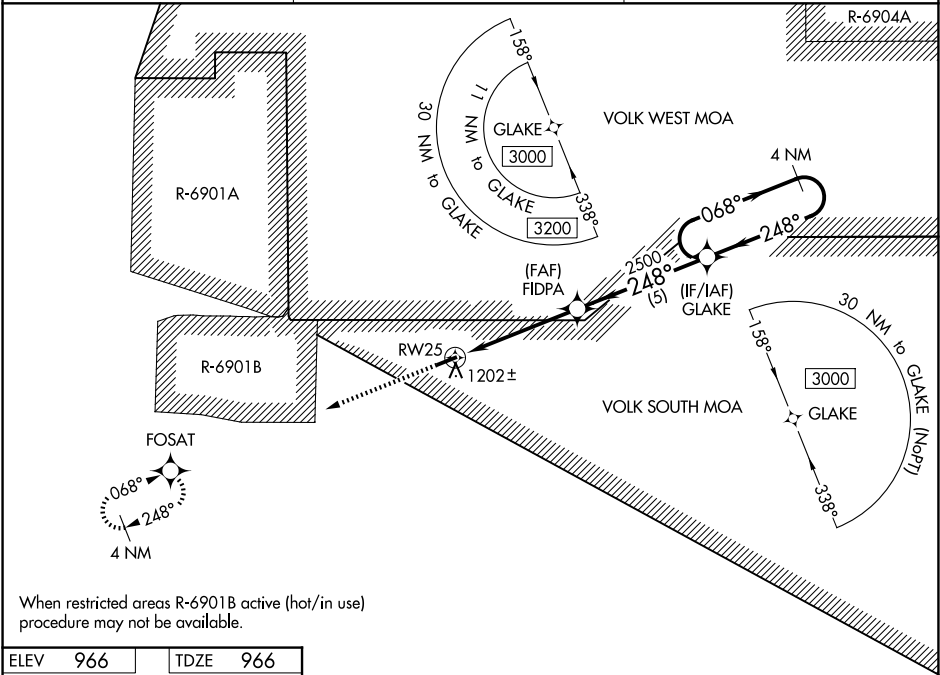

ELEV 966	TDZE 966
-----------------	-----------------

3000

FOSAT

248°

3900 X 75

25

RW25

FIDPA

2500

248°

3000

068°

248°

4 NM

Holding Pattern

4.7 NM

5 NM

≤ 3.00°

TCH 40

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 35).

GLAKE

CATEGORY	A	B	C	D
LP MDA	1440-1	474 (500-1)	1440-1 ³ / ₈ 474 (500-1 ³ / ₈)	NA
LNAV MDA	1480-1	514 (600-1)	1480-1 ³ / ₈ 514 (600-1 ³ / ₈)	NA
CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

MIRL Rwy 7-25

REIL Rwy 7 and 25