

WAAS CH 81839 W13A	APP CRS 133°	Rwy Ldg TDZE Apt Elev	5701 2948 2965
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

BOWMAN RGNL (BWW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cat C visibility ⅜ mile. Baro-VNAV and VDP NA when using Hettinger altimeter setting.

MISSED APPROACH:
Climb to 3400 then climbing left turn to 6000 direct HAYNI and hold.

AWOS-3PT 118.075	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	--	---------------------------------

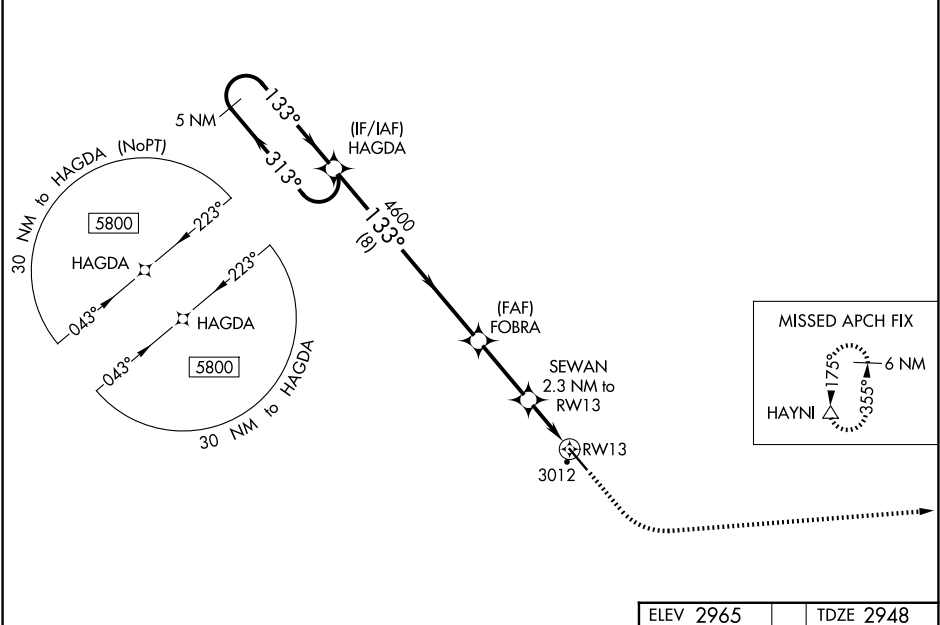

5 NM Holding Pattern		ELEV 2965		TDZE 2948	
HAGDA		FOBRA		SEWAN	
5800		4600		3700	
GP 3.00° TCH 40		*LNAV only		RWY 13	
8 NM		2.8 NM		1.4 NM	
CATEGORY		A		B	
LPV DA		3198-1		250 (300-1)	
LNAV/VNAV DA		3198-1		250 (300-1)	
LNAV MDA		3280-1		332 (400-1)	
CIRCLING		3380-1 415 (500-1)		3420-1 455 (500-1)	
		3580-1¾ 615 (700-1¾)		3580-2 615 (700-2)	
		REIL Rwy 13 and 31 1		MIRL Rwy 13-31 1	