


ATIS 133.0 284.5	Rwy	Knots	60	120	180	240	300	360
CLNC DEL 294.7	22	V/V(fpm)	975	1950	2925	4900	4875	5850
GND CON 134.5 338.35	Minimum Climb Rate to 4500							
TOWER 120.7 (CTAF) 360.2								
APP/DEP CON ★ 125.0 263.5								

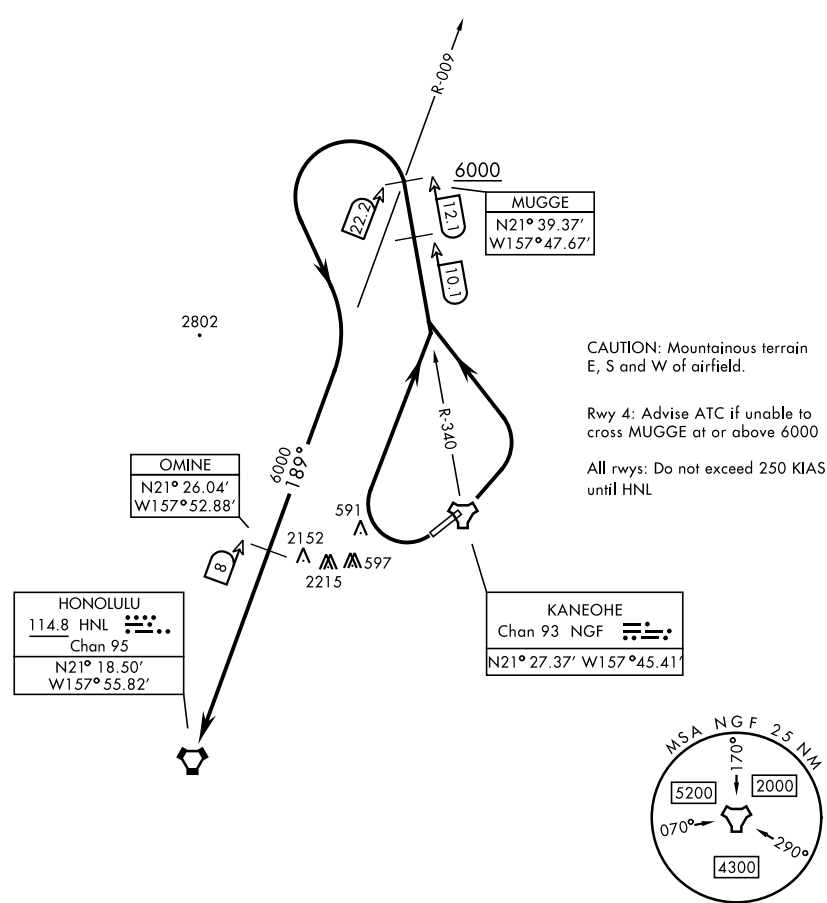

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 4: Turn left to intercept NGF TACAN R-340 to MUGGE, then intercept HNL VORTAC R-009 to HNL. Cross MUGGE at or above 6000.

TAKEOFF RWY 22: Turn right as soon as practicable to intercept NGF TACAN R-340 to MUGGE, then intercept HNL VORTAC R-009 to HNL.