


APP CRS	Rwy Ldg	8006
138°	TDZE	459
	Apt Elev	459

RNAV (RNP) Z RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP AR APCH - GPS. Authorization required. From WLSN, LIBEE: RF		ALSF-1	MISSED APPROACH: Climb to 3000 direct BUFFE and hold.
▼ ▲ NA For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5500. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.		▲ (A)	

ATIS	ST LOUIS APP CON	SCOTT TOWER	GND CON
128.7 256.7	125.2 281.5	128.25 253.5	119.2 275.8

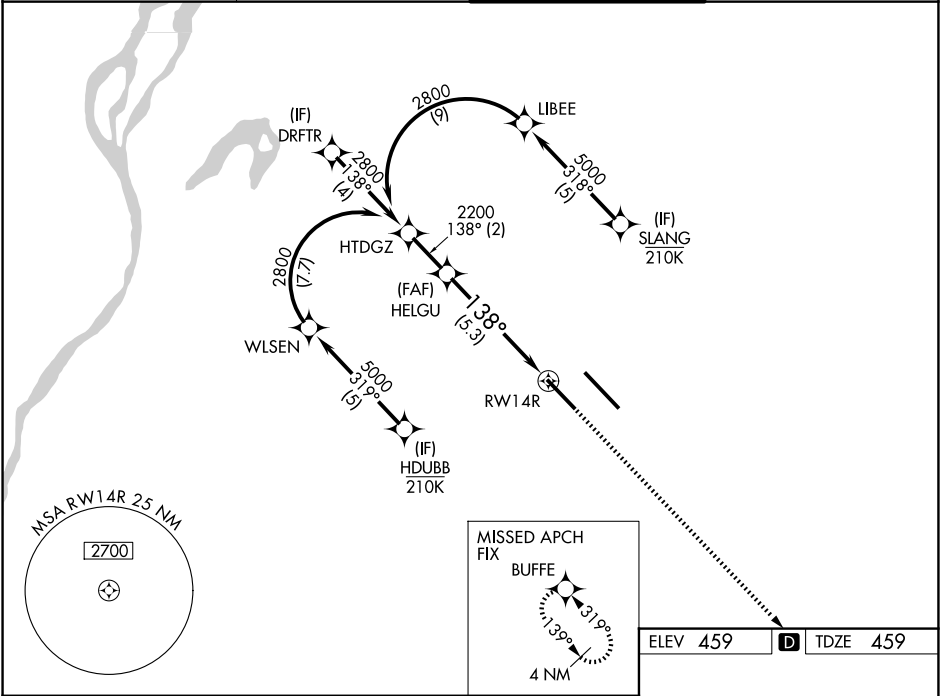

HTDGZ		See planview for multiple IF locations.		3000	BUFFE
2800		138°		↑	★
GP 3.00°		TCH 51		4 NM	
2200		2 NM		5.3 NM	
CATEGORY	A	B	C	D	
RNP 0.11 DA		803/30	344 (400-½%)		
RNP 0.15 DA		871/40	412 (500-¾)		
RNP 0.30 DA		1019/60	560 (600-1¼)		
AUTHORIZATION REQUIRED					
REIL Rwy 14L HIRL Rwy 14L-32R and 14R-32L					

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026