

RNAV (GPS) RWY 13L

APCH CRS 132°	Rwy Idg 5002 TDZE 18 Arpt Elev 18
-------------------------	--

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH - GPS

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).

MISSED APPROACH: Climb to 600, then climbing right turn to 1600 direct POLCK and hold.

ATIS ★
127.9 29

APP CON
120.9 259.3

NAVY CORPUS TOWER★
134.85 340.2

GND CON	
118.7	257.85

ASR/PAR

(IAF)
CORPUS CHRISTI
CRP


(IF)
STURT

Northbound arrivals on V70-407 and V13-20-163 require turn in holding at CRP VORTAC (See L-20) for procedure entry, or RADAR vectors. Holding at CRP VORTAC NA for TACAN users.

(FAF)
RULKE




When local altimeter setting not received,
use Corpus Christi (CRP) Intl altimeter setting.

Baro-VNAV not authorized when
local altimeter not available.




EMERG SAFE ALT 100 NM 11,100

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.

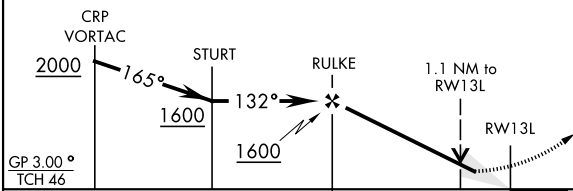

CATEGORY	A	B	C	D
LNAV/VNAV DA	268-1	250	(300-1)	
LNAV MDA	400-1 382 (400-1)		400-1½ 382 (400-1½)	
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	420-1 402 (500-1)		420-1½ 402 (500-1½)	
CIRCLING	500-1 482 (500-1)		540-1½ 522 (600-1½)	620-2 602 (700-2)



HIRL all rwys **L**
REIL Rwy 13L-31R **L**
REIL Rwy 4-22, 18-36, 31L

CORPUS CHRISTI, TEXAS

27°42'N-97°17'W

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

Amdt 2 30NOV23

RNAV (GPS) RWY 13L