

RNAV (GPS) RWY 31L


APCH CRS	Rwy Idg	8001
312°	TDZE	17
	Arpt Elev	18

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)


RNP APCH - GPS	MISSED APPROACH: Climb to 600, then climbing right turn to 2000 direct UBOAT and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).	

ATIS ★ 127.9 290.9	APP CON 120.9 259.3	NAVY CORPUS TOWER ★ 134.85 0 340.2	GND CON 118.7 257.85	ASR/PAR
-----------------------	------------------------	---------------------------------------	-------------------------	---------

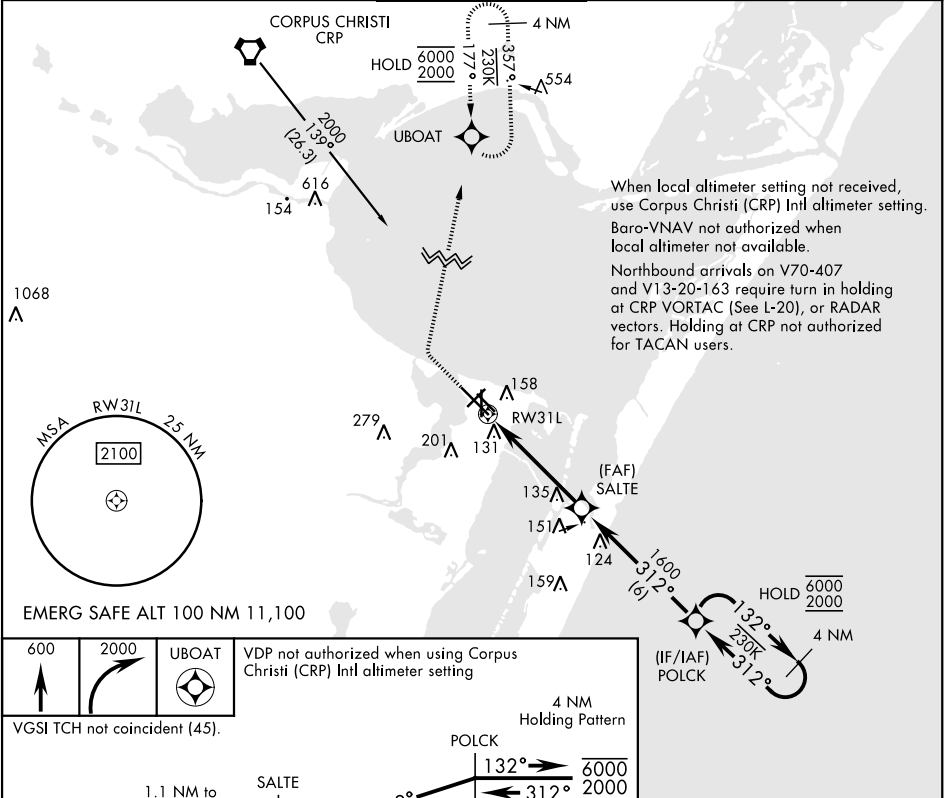


When local altimeter setting not received, use Corpus Christi (CRP) Intl altimeter setting. Baro-VNAV not authorized when local altimeter not available. Northbound arrivals on V70-407 and V13-20-163 require turn in holding at CRP VORTAC (See L-20), or RADAR vectors. Holding at CRP not authorized for TACAN users.

600	2000	UBOAT	VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting
-----	------	-------	---

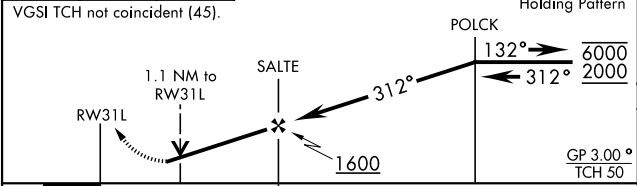

CATEGORY	A	B	C	D
LNAV/VNAV DA	412-1½	395	(400-1½)	
LNAV MDA	420-1	403 (500-1)	420-1½	403 (500-1½)
CIRCLING	460-1	480-1	520-1½	580-2
	442 (500-1)	462 (500-1)	502 (600-1½)	562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	460-1	443 (500-1)	460-1½	443 (500-1½)
CIRCLING	500-1	482 (500-1)	540-1½	620-2
			522 (600-1½)	602 (700-2)

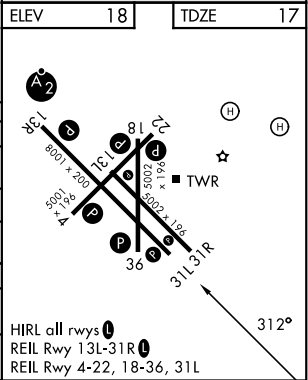

RNAV (GPS) RWY 31L

SC-3, 01 OCT 2026 to 29 OCT 2026

SC-3, 01 OCT 2026 to 29 OCT 2026