

RNAV (GPS) RWY 31R

APCH CRS	Rwy Idg	5002
312°	TDZE	18
	Arpt Elev	18

[USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH - GPS

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).

MISSED APPROACH: Climb to 600, then climbing right turn to 2000 direct UBOAT and hold.

ATIS ★	APP CON	NAVY CORPUS TOWER ★	GND CON	ASR/PAR
127.9 290.9	120.9 259.3	134.85 340.2	118.7 257.85	

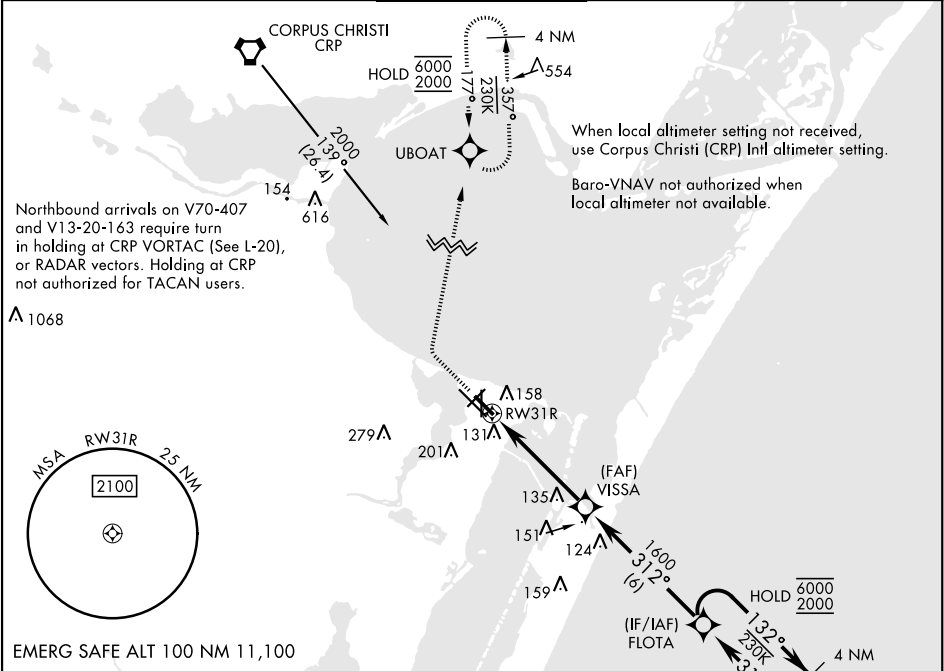

600

↑

2000

↷

UBOAT

VDP not authorized when using Corpus Christi (CRP) Init altimeter setting.

4 NM Holding Pattern

FLOTA

132°↗

↖312°

6000

2000

VGSI TCH not coincident (45).

1.1 NM to RW31R

↖

↗

312°

1600


GP 3.00°

TCH 50

4.8 NM

↔

CATEGORY	A	B	C	D
LNAV/VNAV DA	411-1½		393	(400-1½)
LNAV MDA	420-1	402 (500-1)	420-1½	402 (500-1½)
CIRCLING	460-1	480-1	520-1½	580-2
	442 (500-1)	462 (500-1)	502 (600-1½)	562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	460-1	442 (500-1)	460-1½	442 (500-1½)
CIRCLING	500-1	482 (500-1)	540-1½	620-2
			522 (600-1½)	602 (700-2)

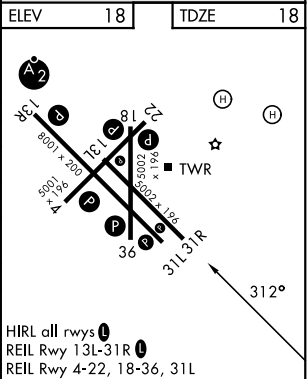

RNAV (GPS) RWY 31R

SC-3, 01 OCT 2026 to 29 OCT 2026

SC-3, 01 OCT 2026 to 29 OCT 2026