

WAAS CH 42701 W17A	APP CRS 173°	Rwy Ldg 6014 TDZE 1351 Apt Elev 1354
--	------------------------	---

RNAV (GPS) RWY 17R

CLARENCE E PAGE MUNI (R/C/E)


▼

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wiley Post altimeter setting and increase all DA 29 feet and all MDA 40 feet and increase LPV all Cats visibility ¼ mile. VDP NA when using Wiley Post altimeter setting.

⚠

MISSED APPROACH: Climb to 3800 direct JEBGO and hold.

AWOS-3 125.05	OKE CITY APP CON 124.6 266.8	UNICOM 123.0 (CTAF) 📶
-------------------------	--	--

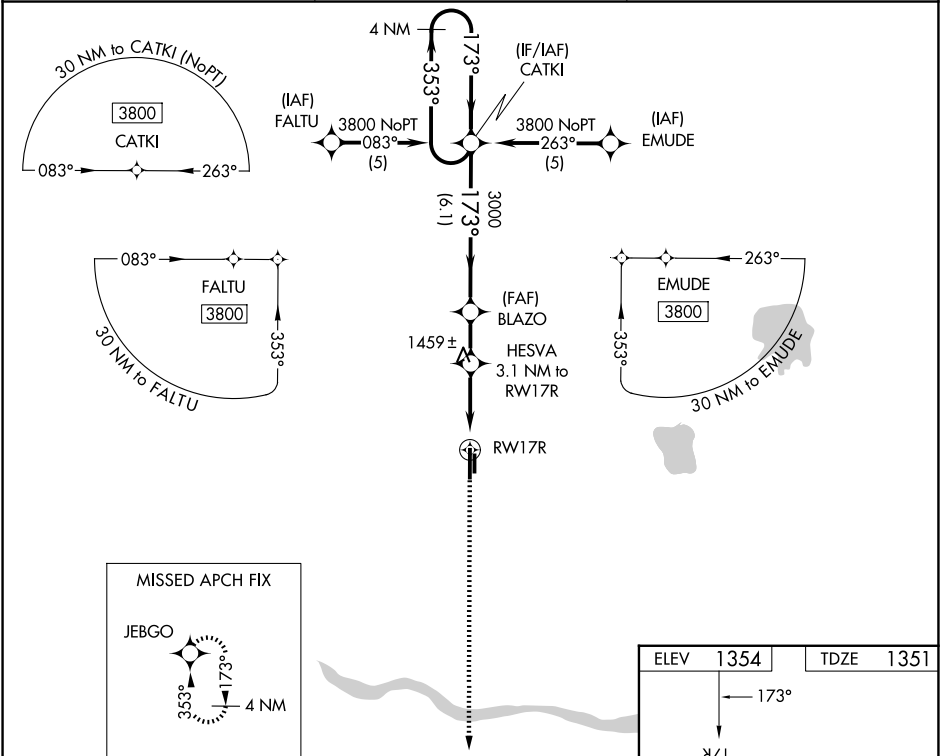

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident. (VGSI Angle 3.00/TCH 52).		3800	JEBGO
GP 3.00° TCH 52		CATKI		BLAZO	HESVA
3800		3530		3000	2380
173°		173°		173°	173°
6.1 NM		1.9 NM		2 NM	1.1 NM
CATEGORY		A		B	
LPV DA		1601-¾		250 (300-¾)	
LNAV MDA		1760-1		409 (500-1)	
CIRCLING		1800-1		1820-1	
		446 (500-1)		466 (500-1)	
		1840-1½		486 (500-1½)	

ELEV 1354

TDZE 1351

173°

17R

17L

35L

35R

601.4 X 100

3502 X 75

35L

35R

MIRL Rwy 17L-35R **📶**

HIRL Rwy 17R-35L **📶**