


HI-ILS or LOC/DME RWY 21L

LOC I-EMJ 110.9	APCH CRS 213°	Rwy Idg TDZE Arpt Elev 9912 1084 1084	[USAF]	LUKE AFB (KLUF)
RADAR required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase vis to 1½ miles.			ALSF-1 	MISSED APPROACH: Climbing to 5000, intercept LUF TACAN R-213 to 19 DME (CESAT). Contact LUKE APP CON.
ATIS ★ 134.925 269.85	APP CON ★ 118.15 363.125	TOWER ★ 119.1 379.9	GND CON ★ 133.175 335.8	CLNC DEL ★ 126.25 273.475

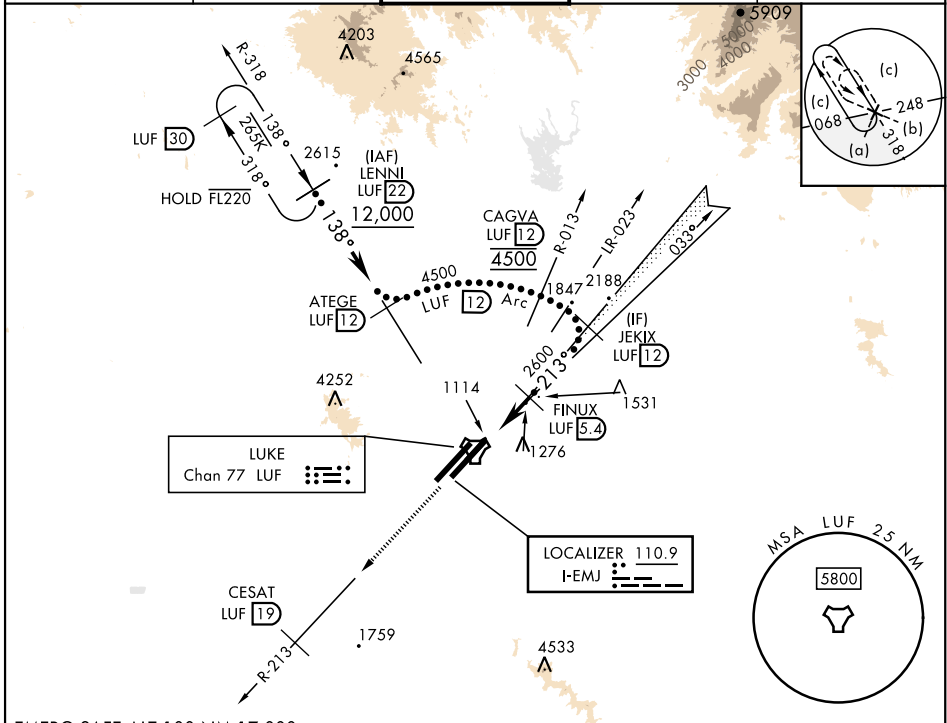

EMERG SAFE ALT 100 NM 17,000			ELEV 1084	TDZE 1084
5000 LUF R-213	CESAT LUF 19			
CATEGORY	C	D	E	
S-ILS 21L ★	1284-½	200 (200-½)		
S-LOC/ DME 21L	1600-1	516 (600-1)		
SIDESTEP 21R	1600-2	516 (600-2)		
CIRCLING	NOT AUTHORIZED			
				HIRL all rwys

HI-ILS or LOC/DME RWY 21L