

ALTUS, OKLAHOMA

RNAV (RNP) X RWY 18R

APCH CRS 175°	Rwy Idg	13,440
	TDZE	1378
	Arpt Elev	1382

(USAF)

ALTUS AFB (KLTS)

RNP AR APCH - RF

T * When ALS inop, increase RVR to 45, vis to 7/8 mile.
** When ALS inop, increase RVR to 60, vis to 1 1/8 miles.



MISSED APPROACH: Climb to 4000 on track
175° to OKKIE and hold.


ATIS★
109.8 273.5

APP CON
125.1 353.7

TOWER★
119.65 254.4

GND CON
121.85 275.8



For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C .

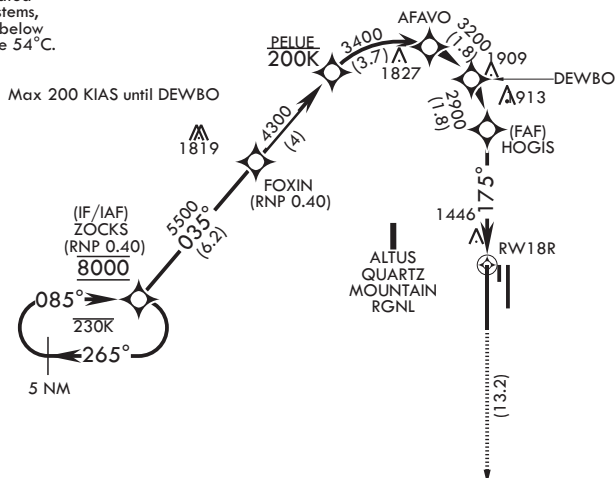

AUTHORIZATION
REQUIRED
FOR USE BY 97
AMW ACFT ONLY

EMERG SAFE ALT 100 NM 4900

ATC RADAR required for holding above 4000.

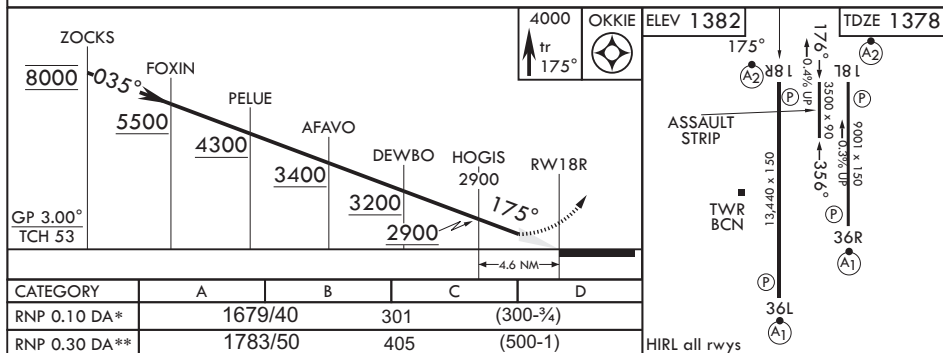

ALTUS, OKLAHOMA

34°40'N - 99°16'W

ALTUS AFB (KLTS)

Amdt 2 14JUL22

RNAV (RNP) X RWY 18R

SC-1, 01 OCT 2026 to 29 OCT 2026

SC-1, 01 OCT 2026 to 29 OCT 2026