

ILS RWY 21L (CAT II)

LOC I-SUU <u>110.1</u>	APCH CRS 215°	Rwy Idg 10,995 TDZE 58 Arpt Elev 63
----------------------------------	-------------------------	--

[USAF]

TRAVIS AFB (KSUU)

RNAV1 - GPS or RADAR required


RADAR required for CAT E aircraft for full procedure off of SEATO.



MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold. continue climb in hold to 4500.

ATIS	APP CON	TOWER	GND CON
135.55 292.125	119.9 322.325 (S) 126.6 281.45 (N)	120.75 254.4	121.8 289.4

CATEGORY II ILS SPECIAL
AIRCREW & AIRCRAFT
CERTIFICATION REQUIRED

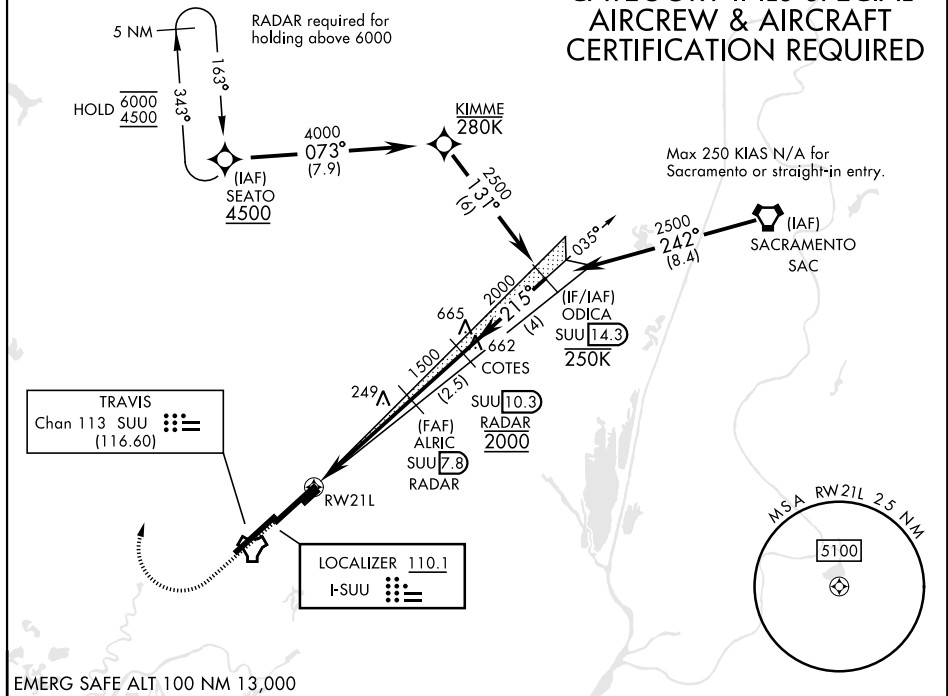

EMERG SAFE ALT 100 NM 13.000

