

|                                               |                        |                                                     |
|-----------------------------------------------|------------------------|-----------------------------------------------------|
| VORTAC RSK<br><b>115.3</b><br>Chan <b>100</b> | APP CRS<br><b>252°</b> | Rwy Ldg<br>TDZE <b>5507</b><br>Apt Elev <b>5507</b> |
|-----------------------------------------------|------------------------|-----------------------------------------------------|



VOR RWY 25  
FOUR CORNERS RGNL (FMN)

DME required.

**⚠** VDP NA when using Durango-La Plata County altimeter setting. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango-La Plata County altimeter setting and increase all MDAs 260 feet; increase S-25 visibility Cat B/C/D ¾ SM and Circling visibility Cat A/B/C ½ SM.

MISSED APPROACH: Climb to 7100 then climbing left turn to 8400 on heading 060° and on RSK VORTAC R-072 to CROMM/9 DME and hold.

|                       |                                       |                                                  |                         |                         |
|-----------------------|---------------------------------------|--------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>127.15</b> | DENVER CENTER<br><b>118.575 348.7</b> | FARMINGTON TOWER★<br><b>118.9 (CTAF) 0 257.8</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------|--------------------------------------------------|-------------------------|-------------------------|

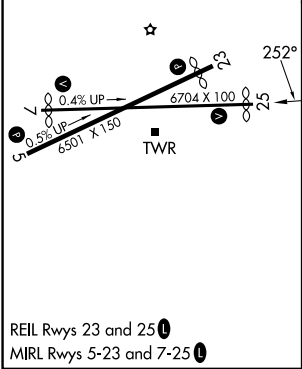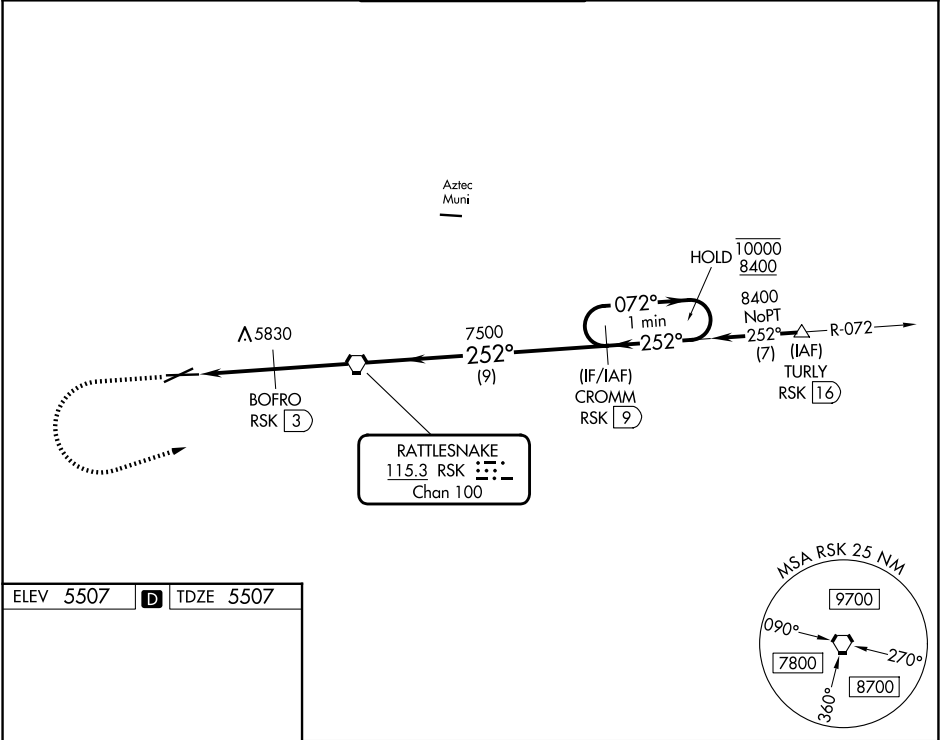

|          |             |             |              |              |            |             |                            |
|----------|-------------|-------------|--------------|--------------|------------|-------------|----------------------------|
|          | 7100        | 8400        | RSK R-072    | CROMM RSK 9  | RSK VORTAC | CROMM RSK 9 | One Minute Holding Pattern |
|          | ↑           | hdg 060°    |              |              |            |             |                            |
|          |             |             | BOFRO RSK 3  |              |            |             |                            |
|          |             |             | RSK 5.8      | RSK 4.1      | TCH 56     |             |                            |
|          |             |             |              |              | 6500       | 7500        |                            |
|          |             |             |              |              |            |             | 072° → 10000               |
|          |             |             |              |              |            |             | ← 252° 8400                |
|          |             |             |              |              |            |             |                            |
| CATEGORY | A           | B           | C            | D            |            |             |                            |
| S-25     | 6080-1      | 573 (600-1) | 6080-1½      | 573 (600-1½) |            |             |                            |
| CIRCLING | 6080-1      | 6140-1      | 6380-2½      | 6460-3       |            |             |                            |
|          | 573 (600-1) | 633 (700-1) | 873 (900-2½) | 953 (1000-3) |            |             |                            |

SW-1, 01 OCT 2026 to 29 OCT 2026

SW-1, 01 OCT 2026 to 29 OCT 2026