

WAAS CH 99607 W17A	APP CRS 173°	Rwy Ldg TDZE 1952 Apt Elev 1953
--	------------------------	---

RNAV (GPS) RWY 17

PRATT RGNL (P'TT')


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use GBD altimeter setting: increase LPV DA to 2301 feet; increase LNAV/VNAV DA to 2356 feet and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using GBD altimeter setting.

MISSED APPROACH: Climb to 4300 direct ZUSKI and hold.

AWOS-3PT 118.725	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

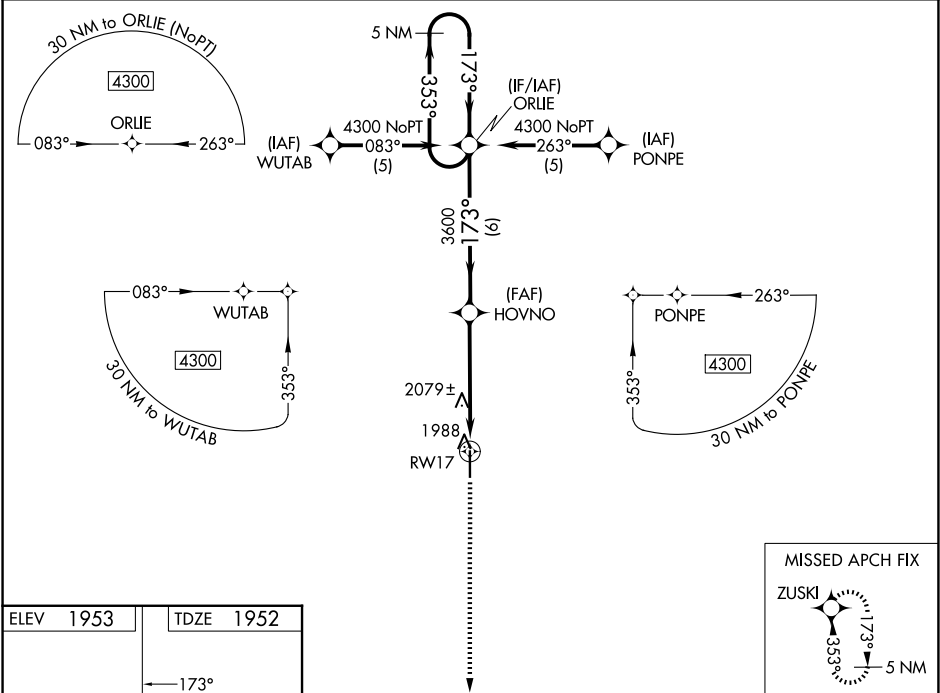

ELEV 1953 TDZE 1952

REIL Rwys 17 and 35 0
MIRL Rwy 17-35 0

5 NM Holding Pattern				ORLIE	4300	ZUSKI
GP 3.00° TCH 40				HOVNO	1.1 NM to RW17	RW17
				6 NM	3.9 NM	1.1 NM
CATEGORY	A	B	C	D		
LPV DA	2202-1 250 (300-1)			NA		
LNAV/VNAV DA	2257-1 305 (400-1)			NA		
LNAV MDA	2340-1	388 (400-1)	2340-1 388 (400-1 1/8)	NA		
CIRCLING	2380-1 427 (500-1)	2420-1 467 (500-1)	2580-1 627 (700-1 3/4)	NA		

NC-2, 01 OCT 2026 to 29 OCT 2026

NC-2, 01 OCT 2026 to 29 OCT 2026