


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>90143</b><br><b>W04A</b> | APP CRS<br><b>036°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7300</b><br><b>4536</b><br><b>4536</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 4

BATTLE MOUNTAIN (BAM)

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS. | MISSED APPROACH: (Do not exceed 175K until DIYLA) Climb to 5400 then climbing left turn to 8900 direct MAJAM and on track 252° to HUNEK and on track 183° direct DIYLA and hold.<br>*Missed approach requires minimum climb of 222 feet per NM to 6480; if unable to meet climb gradient, see LP minimums.<br>#Missed approach requires minimum climb of 218 feet per NM to 7520; if unable to meet climb gradient, see LNAV minimums. |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                         |                                               |                                 |
|-------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.45</b> | SALT LAKE CITY CENTER<br><b>132.25 338.35</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|-------------------------|-----------------------------------------------|---------------------------------|

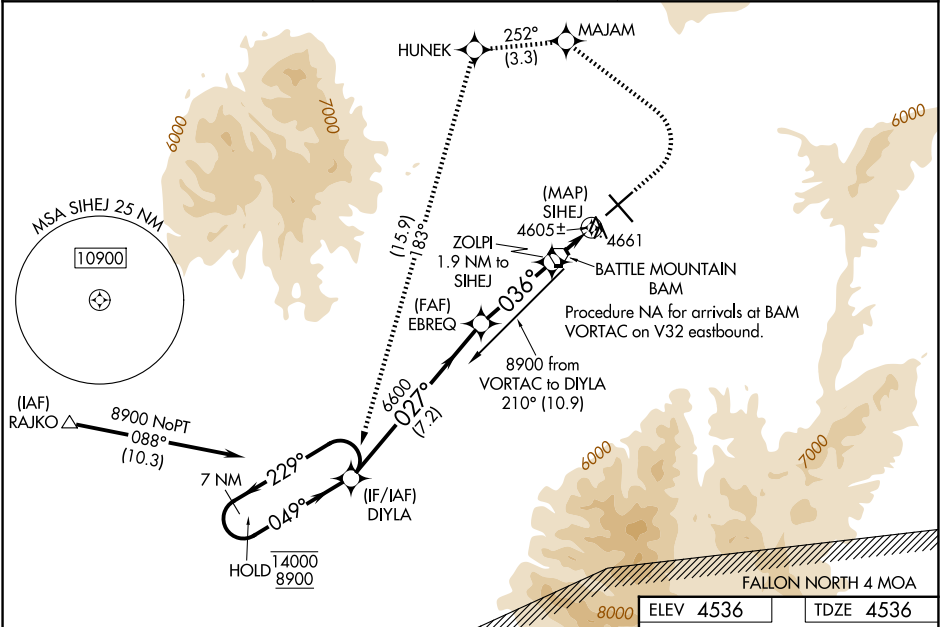

|                      |                       |        |                       |        |       |         |       |         |       |
|----------------------|-----------------------|--------|-----------------------|--------|-------|---------|-------|---------|-------|
| 7 NM Holding Pattern |                       | DIYLA  | 5400                  | 8900   | MAJAM | tr 252° | HUNEK | tr 183° | DIYLA |
| 14000<br>8900        |                       | ←229°  | 049°→                 | 027°   | 036°  | 036°    | 036°  | 036°    | 036°  |
| 7.2 NM               |                       | 3.4 NM | 1.9 NM                | 0.7 NM |       |         |       |         |       |
| CATEGORY             | A                     | B      | C                     | D      |       |         |       |         |       |
| LP MDA*              | 4860-1 324 (400-1)    |        |                       |        | NA    |         |       |         |       |
| LNAV MDA#            | 5020-1 484 (500-1)    |        | 5020-1½ 484 (500-1½)  |        | NA    |         |       |         |       |
| LP MDA               | 5240-1 704 (800-1)    |        | 5240-2 704 (800-2)    |        | NA    |         |       |         |       |
| LNAV MDA             | 5460-1¼ 924 (1000-1¼) |        | 5460-2½ 924 (1000-2½) |        | NA    |         |       |         |       |
| CIRCLING             | 5460-1¼ 924 (1000-1¼) |        | 5460-2¾ 924 (1000-2¾) |        | NA    |         |       |         |       |

