RNAV (GPS) RWY 23

FREEMAN MUNI (SER)

WAAS CH 48903 W23A	APP CRS 226°	Rwy Ldg 6001 TDZE 578 Apt Elev 583

RNP APCH - GPS.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV Cats C/D visibility to 1⅜ SM.

ODALS

MISSED APPROACH: Climb to 2500 direct JIRIP and hold.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.425	132.075 327.0	122.8 (CTAF) L

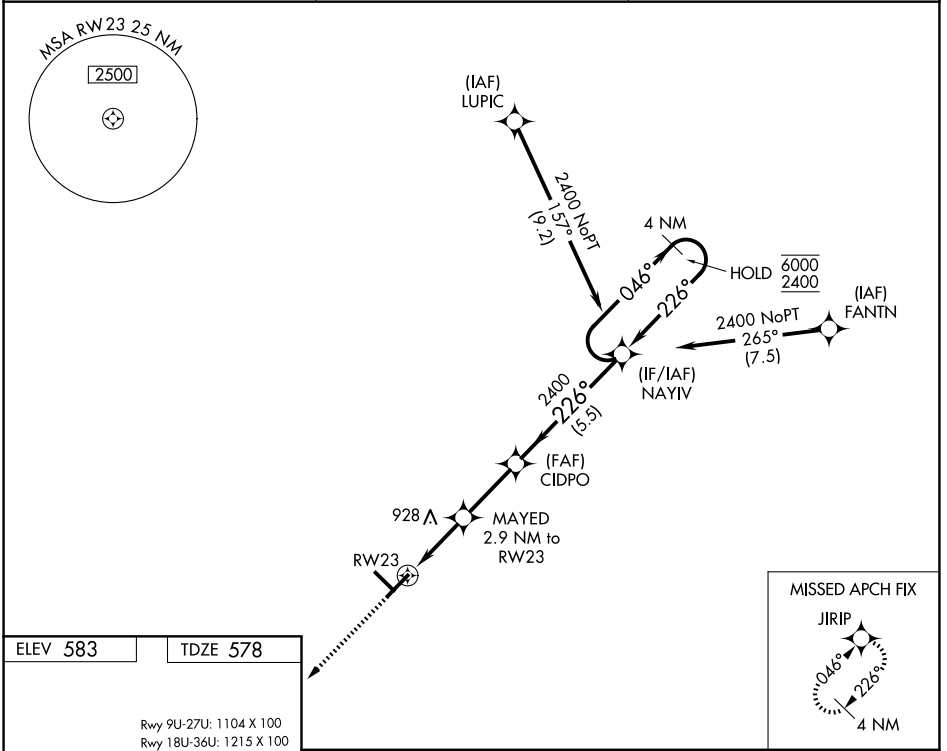

ELEV 583 TDZE 578

Rwy 9U-27U: 1104 X 100
Rwy 18U-36U: 1215 X 100



MIRL Rwys 5-23 and 14-32
REIL Rwys 5, 14, 23 and 32 L

2500 JIRIP

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).

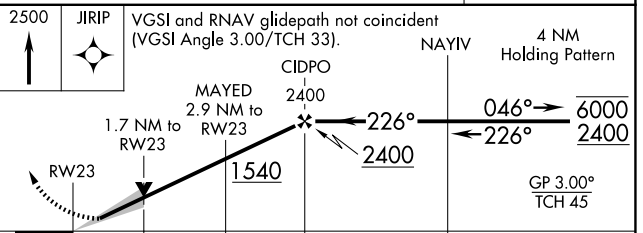

CATEGORY	A	B	C	D
LPV DA		855-1	277 (300-1)	
LNAV/VNAV DA		1020-1⅛	442 (500-1⅛)	
LNAV MDA	1160-1 582 (600-1)		1160-1⅝ 582 (600-1⅝)	
CIRCLING	1160-1 577 (600-1)		1240-1¾ 657 (700-1¾)	1240-2 657 (700-2)

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026