WAAS	APP CRS	Rwy Ldg	8005
CH 99732	101°	TDZE	38
W10A		Apt Elev	40

RNAV (GPS) RWY 10

WALLOPS FLIGHT FACILITY (WAL)

DME/DME RNP -0.3 NA. Rwy 10 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 60 feet and all visibilities ¼ SM. Increase all MDA 60 feet and all Cat C and D visibilities ¼ SM. Baro-VNAV and VDP NA when using Salisbury altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct MAGGO and hold.

ASOS	PATUXENT APP CON★	WALLOPS TOWER★	GND CON
119.175	127.95 314.0	126.5 (CTAF) 306.975 (CTAF)	127.875 269.325

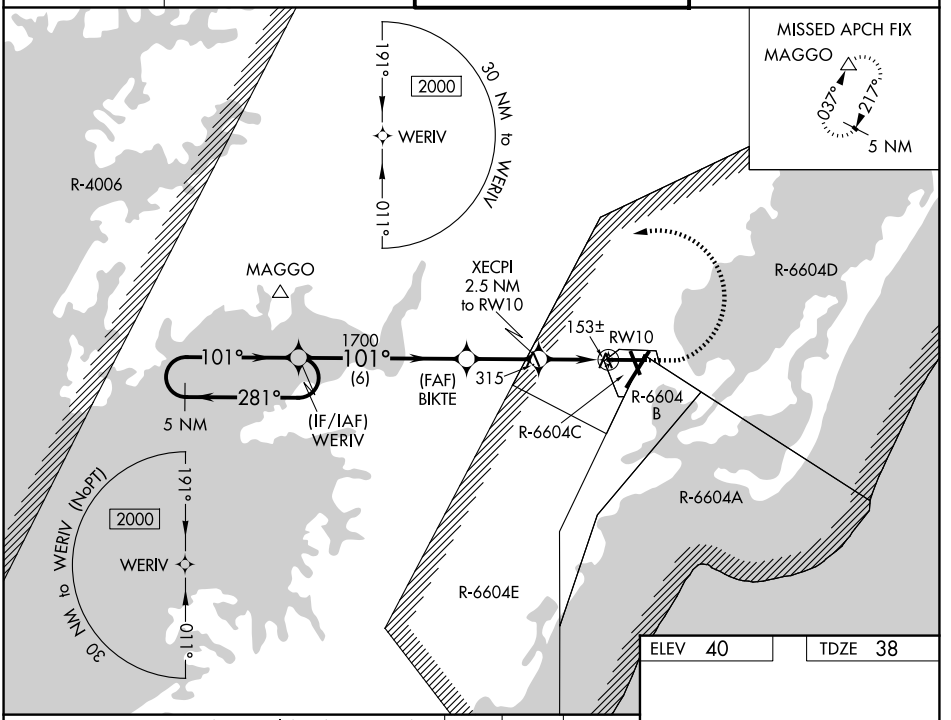

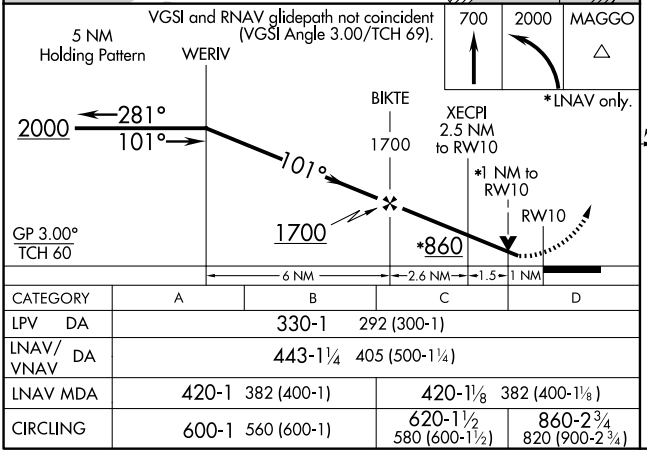

CATEGORY	A	B	C	D
LPV DA	330-1	292 (300-1)		
LNAV/VNAV DA	443-1¼	405 (500-1¼)		
LNAV MDA	420-1 382 (400-1)		420-1⅛ 382 (400-1⅛)	
CIRCLING	600-1 560 (600-1)		620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

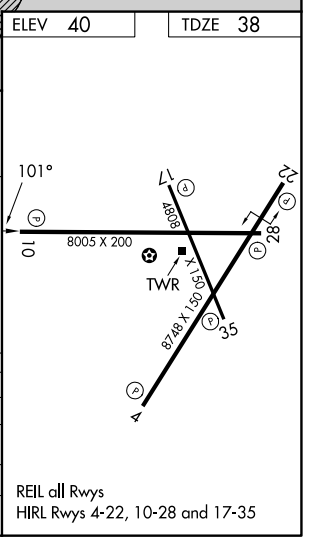

NE-3, 01 OCT 2026 to 29 OCT 2026
NE-3, 01 OCT 2026 to 29 OCT 2026