WAAS	APP CRS	Rwy Ldg	4808
CH 53732	349°	TDZE	39
W35A		Apt Elev	40

RNAV (GPS) RWY 35

WALLOPS FLIGHT FACILITY (WAL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 343; increase LNAV/VNAV DA to 464 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D visibility ⅛ mile and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting. Helicopter visibility reduction below ¾ SM NA. Procedure NA when R-6604 active.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct MAGGO and hold.

ASOS	PATUXENT APP CON★	WALLOPS TOWER★	GND CON
119.175	127.95 314.0	126.5 (CTAF) 306.975 (CTAF)	127.875 269.325

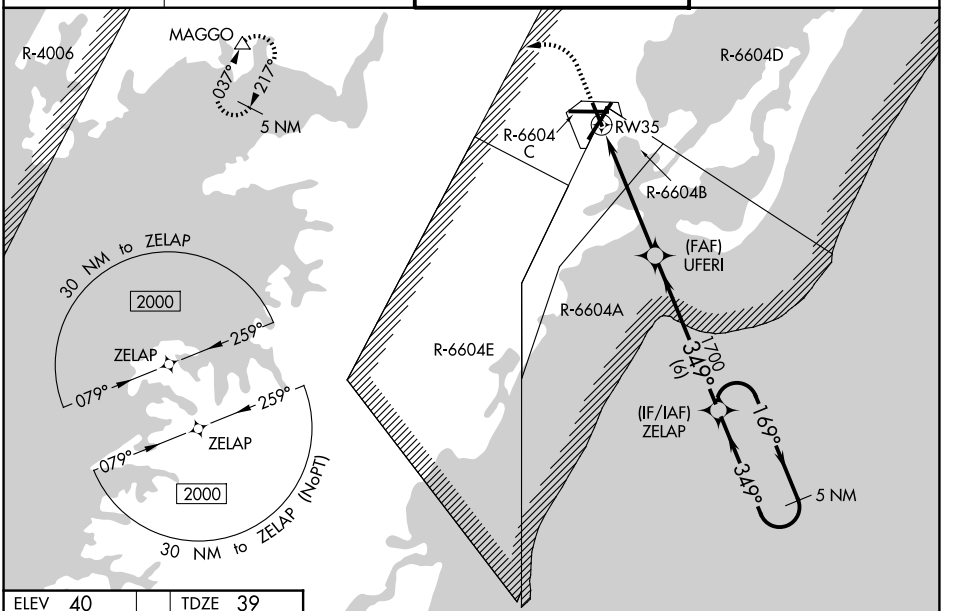

ELEV 40 TDZE 39



REIL all Rwys
HIRL Rwys 4-22, 10-28 and 17-35

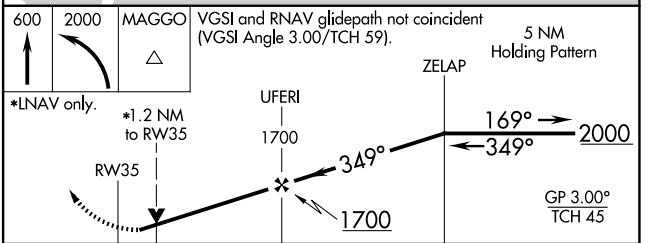

CATEGORY	A	B	C	D
LPV DA	289-1	250 (300-1)		
LNAV/VNAV DA	410-1¼	371 (400-1¼)		
LNAV MDA	460-1	421 (500-1)	460-1¼	421 (500-1¼)
CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

NE-3, 01 OCT 2026 to 29 OCT 2026